

# Pressure transmitter

## For demanding industrial applications

### Model S-20

WIKA data sheet PE 81.61



For further approvals,  
see page 13

#### Applications

- Critical industrial applications
- Demanding applications in research and development
- Harsh environments in the process industry

#### Special features

- Extreme variety, available at short notice from 1 piece
- High accuracy, low temperature error, selectable adjustment temperature
- Proven technology
- Special media and special versions

#### Description

The S-20 pressure transmitter is a versatile specialist for demanding tasks and harsh environments. The measuring ranges from 0 ... 0.4 to 0 ... 1,600 bar [0 ... 5.8 to 0 ... 23,200 psi] can be combined with many output signals, electrical connections and process connections. These configuration possibilities allow for over 1 billion versions and leave much room for tailor-made customisation. The S-20 is also at home in critical industrial applications and works reliably with heat, vibrations or aggressive media.

##### Extreme variety, available at short notice from 1 piece

The S-20 can be freely configured and optimally adapted to the plant requirements. All common versions are available from a batch size of 1 within a few days.

##### High accuracy, low temperature error, selectable adjustment temperature

The S-20 measures pressures particularly accurately and reliably and is available in three accuracy classes.



Pressure transmitter, model S-20

The selectable adjustment temperatures of +4 °C, +40 °C, +60 °C and +80 °C [+39 °F, +104 °F, +140 °F, +176 °F] reduce the temperature error to a minimum.

##### Proven technology

The S-20 is based on proven technologies, tried and tested in the field. With up to 100 million load cycles and a long-term stability to < 0.1 %, it constantly provides precise data for processes and plants. Regular audits permanently ensure highest quality standards.

##### Special media and special versions

Versions for special media, for example oxygen and hydrogen applications, high temperatures and levels of cleanliness are available. In addition, the S-20 can be delivered with IP68 and IP6K9K ingress protection.

Configurator



Standard articles



# Specifications

The model S-20 is available with an improved non-linearity. Depending on the selected non-linearity the following values result:


Accuracy specifications	Non-linearity ≤ ±0.5 % of span	Non-linearity ≤ ±0.25 % of span	Non-linearity ≤ ±0.125 % of span <sup>1)</sup>
Non-linearity per BFSL per IEC 61298-2	≤ ±0.5 % of span	≤ ±0.25 % of span	≤ ±0.125 % of span
Non-linearity per terminal method per IEC 61298-2	≤ ±1 % of span	≤ ±0.5 % of span	≤ ±0.25 % of span
Accuracy at adjustment temperature	→ See “Max. measured error per IEC 61298-2”		
Max. measured error per IEC 61298-2	≤ ±1 % of span	≤ ±0.5 % of span	≤ ±0.25 % of span

1) Restrictions for the non-linearity of 0.125 % BFSL or 0.25 % per terminal method:  
 Available output signals: 4 ...20 mA and DC 0 ... 10 V  
 Available measuring ranges: all measuring ranges specified in the data sheet  
 Other output signals or measuring ranges on request.

Further details on: accuracy specifications	
Non-repeatability per IEC 61298-2	≤ 0.1 % of span
Zero point error	<ul style="list-style-type: none"> <li>■ ≤ ±0.2 % of span, factory-set</li> <li>■ ≤ ±0.1 % of span, factory-set <sup>1)</sup></li> </ul>
Temperature hysteresis	≤ 0.1 % of span at > 80 °C [176 °F]
Long-term drift per IEC 61298-2	<ul style="list-style-type: none"> <li>■ ≤ ±0.1 % of span</li> <li>■ ≤ ±0.2 % of span (with special measuring ranges and measuring ranges &lt; 1 bar [<math>&lt;15</math> psi])</li> </ul>
Temperature error (for adjustment temperature 15 ... 25 °C [59 ... 77 °F])	→ See chart „Temperature error“  For measuring ranges < 1 bar [ $<15$ psi], special measuring ranges and instruments with an increased overpressure limit, the respective temperature error increases by 0.5 % of span
Adjustment temperature	<ul style="list-style-type: none"> <li>■ 15 ... 25 °C [59 ... 77 °F]</li> <li>■ 4 °C ±5 °C [39.2 °F ±9 °F]</li> <li>■ 40 °C ±5 °C [104 °F ±9 °F]</li> <li>■ 60 °C ±5 °C [140 °F ±9 °F]</li> <li>■ 80 °C ±5 °C [176 °F ±9 °F]</li> </ul>
<b>Additional zero point error depending on the mounting position for measuring ranges ≤ 1 bar [<math>\leq 15</math> psi]</b>	
Mounting position 180°, vertical, top process connection	≤ 1 mbar [ $\leq 0.015$ psi]
Mounting position 90°, horizontal, lateral process connection	≤ 0.6 mbar [ $\leq 0.009$ psi]
Reference conditions	Per IEC 61298-1

1) Restrictions for zero point error 0.1 % (factory-set):  
 Available output signals: 4 ...20 mA and DC 0 ... 10 V  
 Available measuring ranges: all gauge pressure measuring ranges specified in the data sheet  
 Not available in combination with optional adjustment temperatures.

## Temperature error

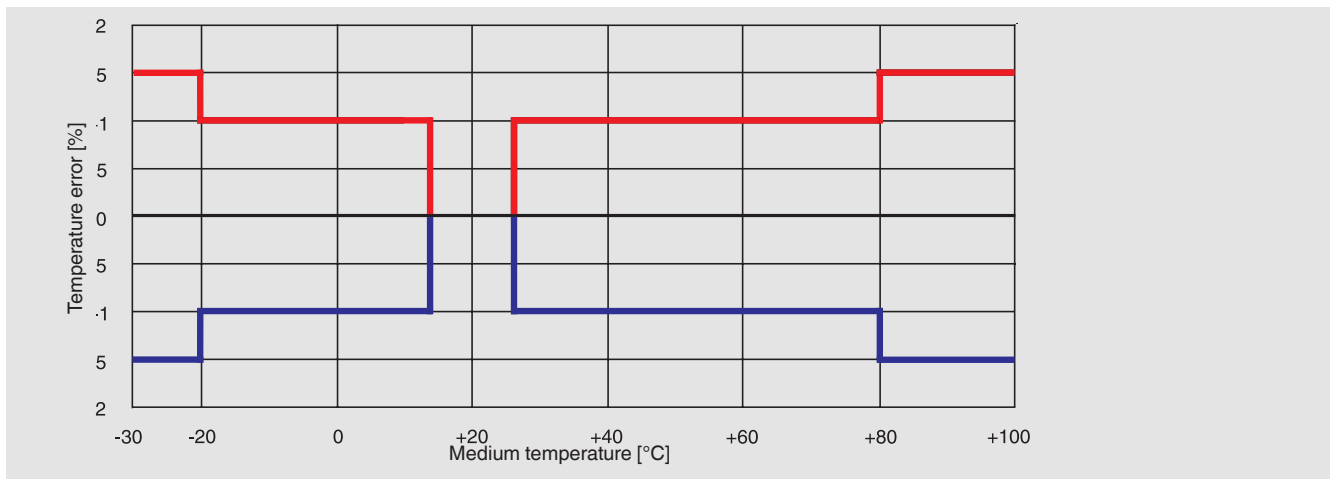

## Measuring ranges, gauge pressure

bar	
0 ... 0.4	0 ... 40
0 ... 0.6	0 ... 60
0 ... 1	0 ... 100
0 ... 1.6	0 ... 160
0 ... 2.5	0 ... 250
0 ... 4	0 ... 400
0 ... 6	0 ... 600
0 ... 10	0 ... 1,000
0 ... 16	0 ... 1,600
0 ... 25	-

psi	
0 ... 10	0 ... 600
0 ... 15	0 ... 750
0 ... 25	0 ... 1,000
0 ... 30	0 ... 1,500
0 ... 50	0 ... 2,000
0 ... 60	0 ... 3,000
0 ... 100	0 ... 4,000
0 ... 150	0 ... 5,000
0 ... 160	0 ... 6,000
0 ... 200	0 ... 7,500
0 ... 250	0 ... 10,000
0 ... 300	0 ... 15,000
0 ... 400	0 ... 20,000
0 ... 500	-

## Measuring ranges, absolute pressure

bar abs.	
0 ... 0.4	0 ... 6
0 ... 0.6	0 ... 10
0 ... 1	0 ... 16
0 ... 1.6	0 ... 25
0 ... 2.5	0 ... 40
0 ... 4	-

psi abs.	
0 ... 10	0 ... 150
0 ... 15	0 ... 160
0 ... 25	0 ... 200
0 ... 30	0 ... 250
0 ... 50	0 ... 300
0 ... 60	0 ... 400
0 ... 100	0 ... 500

## Vacuum and compound measuring ranges

bar	
-0.4 ... 0	-1 ... +5
-0.6 ... 0	-1 ... +9
-1 ... 0	-1 ... +15
-1 ... +0.6	-1 ... +24
-1 ... +1.5	-1 ... +39
-1 ... +3	-1 ... +59

psi	
-30 inHg ... 0	-30 inHg ... +100
-30 inHg ... +15	-30 inHg ... +160
-30 inHg ... +30	-30 inHg ... +200
-30 inHg ... +45	-30 inHg ... +300
-30 inHg ... +60	-30 inHg ... +500

Further details on: measuring ranges		
<b>Units</b>	<ul style="list-style-type: none"> <li>■ bar</li> <li>■ psi</li> <li>■ kg/cm<sup>2</sup></li> <li>■ MPa</li> <li>■ kPa</li> </ul>	
<b>Maximum working pressure</b>	<p>→ Corresponds to the upper measuring range value / measuring range full scale value</p> <p>→ Any permanent operation above the maximum working pressure is not permissible</p>	
<b>Special measuring ranges</b>	From 0 ... 0.4 to 0 ... 1,600 bar [0 ... 10 to 0 ... 20,000 psi] available on request. Special measuring ranges have an increased long-term drift and higher temperature errors.	
<b>Overpressure limit</b>	<p>The overpressure limit is based on the measuring range.</p> <p>Depending on the selected process connection and the seal, restrictions in overpressure limit can result.</p> <p>A higher overpressure limit will result in a higher temperature error.</p>	
bar	Measuring ranges ≤ 16 bar	3 times
	Measuring ranges > 16 bar	2 times
	Measuring range 1,000 bar	1.45 times
	Measuring ranges > 1,000 bar	1.25 times
bar abs.	Measuring ranges ≤ 16 bar abs.	3 times
	Measuring ranges > 16 bar abs.	2 times
	Measuring range 40 bar abs.	1.5 times
psi	Measuring ranges ≤ 300 psi	3 times
	Measuring ranges > 300 psi	2 times
	Measuring ranges 600 psi, 1,000 psi, 1,500 psi, 4,000 psi, 6,000 psi, 10,000 psi	1.7 times
	Measuring range 15,000 psi	1.45 times
	Measuring ranges > 15,000 psi	1.25 times
psi abs.	Measuring ranges ≤ 300 psi abs.	3 times
	Measuring ranges > 300 psi abs.	2 times
	Measuring range 500 psi abs.	1.5 times
<b>Vacuum resistance</b>	Yes	
<b>Leakage rate</b>	<ul style="list-style-type: none"> <li>■ &lt; 5*10<sup>-3</sup> mbar*/s</li> <li>■ &lt; 1*10<sup>-6</sup> mbar*/s <sup>1) 2)</sup></li> </ul>	

1) With oxygen and hydrogen applications.

2) With applications of hazardous fluids, liquids and gases in accordance with directive 2014/68/EU article 13, regulation (EC) no. 1272/2008 or GHS1.

→ Further overpressure limits on request.

Process connection					
Standard	Thread size	Max. measuring range	Overpressure limit	Pressure port	Seal
DIN EN ISO 1179-2	G ¼ A <sup>1)</sup>	600 bar [7,500 psi]	858 bar [12,400 psi]	<ul style="list-style-type: none"> <li>■ 2.5 mm [0.1 in]</li> <li>■ 0.3 mm [0.01 in]</li> <li>■ 0.6 mm [0.02 in]</li> <li>■ 6 mm [0.24 in] <sup>2)</sup></li> </ul>	<ul style="list-style-type: none"> <li>■ NBR</li> <li>■ FPM/ FKM</li> <li>■ EPDM</li> </ul>
		1,000 bar [15,000 psi]	1,480 bar [21,400 psi]	<ul style="list-style-type: none"> <li>■ 2.5 mm [0.1 in]</li> <li>■ 0.3 mm [0.01 in]</li> <li>■ 0.6 mm [0.02 in]</li> </ul>	<ul style="list-style-type: none"> <li>■ FPM/ FKM</li> </ul>
	G ½ A	600 bar [7,500 psi]	858 bar [12,440 psi]	<ul style="list-style-type: none"> <li>■ 2.5 mm [0.1 in]</li> <li>■ 0.3 mm [0.01 in]</li> <li>■ 0.6 mm [0.02 in]</li> <li>■ 12 mm [0.48 in] <sup>2)</sup></li> </ul>	<ul style="list-style-type: none"> <li>■ NBR</li> <li>■ FPM/ FKM</li> </ul>
DIN EN ISO 9974-2	M14 x 1.5	600 bar [7,500 psi]	858 bar [12,440 psi]	<ul style="list-style-type: none"> <li>■ 2.5 mm [0.1 in]</li> <li>■ 0.3 mm [0.01 in]</li> <li>■ 0.6 mm [0.02 in]</li> </ul>	<ul style="list-style-type: none"> <li>■ NBR</li> <li>■ FPM/ FKM</li> <li>■ EPDM</li> </ul>
EN 837	G ⅛ B	400 bar [5,000 psi]	572 bar [8,290 psi]	<ul style="list-style-type: none"> <li>■ 2.5 mm [0.1 in]</li> </ul>	<ul style="list-style-type: none"> <li>■ Copper</li> </ul>
	G ¼ B <sup>1)</sup>	1,000 bar [15,000 psi]	1,480 bar [21,400 psi]	<ul style="list-style-type: none"> <li>■ 2.5 mm [0.1 in]</li> <li>■ 0.3 mm [0.01 in]</li> <li>■ 0.6 mm [0.02 in]</li> </ul>	<ul style="list-style-type: none"> <li>■ Copper</li> <li>■ Stainless steel</li> <li>■ Without</li> </ul>
	G ¼, female	1,000 bar [15,000 psi]	1,480 bar [21,400 psi]	<ul style="list-style-type: none"> <li>■ 2.5 mm [0.1 in]</li> </ul>	-
	G ⅜ B	1,000 bar [15,000 psi]	1,480 bar [21,400 psi]	<ul style="list-style-type: none"> <li>■ 2.5 mm [0.1 in]</li> <li>■ 0.3 mm [0.01 in]</li> <li>■ 0.6 mm [0.02 in]</li> </ul>	<ul style="list-style-type: none"> <li>■ Copper</li> <li>■ Stainless steel</li> <li>■ Without</li> </ul>
	G ½ B <sup>1)</sup>	1,000 bar [15,000 psi]	1,480 bar [21,400 psi]	<ul style="list-style-type: none"> <li>■ 2.5 mm [0.1 in]</li> <li>■ 0.3 mm [0.01 in]</li> <li>■ 0.6 mm [0.02 in]</li> </ul>	<ul style="list-style-type: none"> <li>■ Copper</li> <li>■ Stainless steel</li> <li>■ Without</li> </ul>
DIN 16288	M12 x 1.5	1,000 bar [15,000 psi]	1,480 bar [21,400 psi]	<ul style="list-style-type: none"> <li>■ 2.5 mm [0.1 in]</li> <li>■ 0.3 mm [0.01 in]</li> <li>■ 0.6 mm [0.02 in]</li> </ul>	<ul style="list-style-type: none"> <li>■ Copper</li> <li>■ Stainless steel</li> <li>■ Without</li> </ul>
	M20 x 1.5	1,000 bar [15,000 psi]	1,480 bar [21,400 psi]	<ul style="list-style-type: none"> <li>■ 2.5 mm [0.1 in]</li> <li>■ 0.3 mm [0.01 in]</li> <li>■ 0.6 mm [0.02 in]</li> </ul>	<ul style="list-style-type: none"> <li>■ Copper</li> <li>■ Stainless steel</li> <li>■ Without</li> </ul>
ANSI/ASME B1.20.1	⅛ NPT	400 bar [5,000 psi]	572 bar [8,290 psi]	<ul style="list-style-type: none"> <li>■ 2.5 mm [0.1 in]</li> </ul>	-
	¼ NPT	1,000 bar [15,000 psi]	1,480 bar [21,400 psi]	<ul style="list-style-type: none"> <li>■ 2.5 mm [0.1 in]</li> <li>■ 0.3 mm [0.01 in]</li> <li>■ 0.6 mm [0.02 in]</li> <li>■ 6 mm [0.24 in] <sup>2)</sup></li> </ul>	-
	¼ NPT, female	1,000 bar [15,000 psi]	1,480 bar [21,400 psi]	<ul style="list-style-type: none"> <li>■ 2.5 mm [0.1 in]</li> </ul>	-
	½ NPT <sup>1)</sup>	1,000 bar [15,000 psi]	1,480 bar [21,400 psi]	<ul style="list-style-type: none"> <li>■ 2.5 mm [0.1 in]</li> <li>■ 0.3 mm [0.01 in]</li> <li>■ 0.6 mm [0.02 in]</li> <li>■ 12 mm [0.48 in] <sup>2)</sup></li> </ul>	-
SAE J514	7/16-20 UNF-2A O-ring BOSS	600 bar [7,500 psi]	858 bar [12,400 psi]	<ul style="list-style-type: none"> <li>■ 2.5 mm [0.1 in]</li> <li>■ 0.3 mm [0.01 in]</li> <li>■ 0.6 mm [0.02 in]</li> </ul>	<ul style="list-style-type: none"> <li>■ NBR</li> <li>■ FPM/ FKM</li> </ul>
	7/16-20 UNF-2A 74°	800 bar [10,000 psi]	1,144 bar [16,590 psi]	<ul style="list-style-type: none"> <li>■ 2.5 mm [0.1 in]</li> <li>■ 0.3 mm [0.01 in]</li> <li>■ 0.6 mm [0.02 in]</li> </ul>	-
	9/16-18 UNF-2A O-ring BOSS	600 bar [7,500 psi]	858 bar [12,400 psi]	<ul style="list-style-type: none"> <li>■ 2.5 mm [0.1 in]</li> <li>■ 0.3 mm [0.01 in]</li> <li>■ 0.6 mm [0.02 in]</li> </ul>	<ul style="list-style-type: none"> <li>■ NBR</li> <li>■ FPM/ FKM</li> </ul>

Process connection					
Standard	Thread size	Max. measuring range	Overpressure limit	Pressure port	Seal
ISO 7	R ¼ <sup>1)</sup>	1,000 bar [15,000 psi]	1,480 bar [21,400 psi]	■ 2.5 mm [0.1 in] ■ 0.3 mm [0.01 in] ■ 0.6 mm [0.02 in]	-
	R ⅜	1,000 bar [15,000 psi]	1,480 bar [21,400 psi]	■ 2.5 mm [0.1 in] ■ 0.3 mm [0.01 in] ■ 0.6 mm [0.02 in]	-
	R ½	1,000 bar [15,000 psi]	1,480 bar [21,400 psi]	■ 2.5 mm [0.1 in] ■ 0.3 mm [0.01 in] ■ 0.6 mm [0.02 in]	-
KS	PT ¼ <sup>1)</sup>	1,000 bar [15,000 psi]	1,480 bar [21,400 psi]	■ 2.5 mm [0.1 in] ■ 0.3 mm [0.01 in] ■ 0.6 mm [0.02 in]	-
	PT ⅜	1,000 bar [15,000 psi]	1,480 bar [21,400 psi]	■ 2.5 mm [0.1 in] ■ 0.3 mm [0.01 in] ■ 0.6 mm [0.02 in]	-
	PT ½	1,000 bar [15,000 psi]	1,480 bar [21,400 psi]	■ 2.5 mm [0.1 in] ■ 0.3 mm [0.01 in] ■ 0.6 mm [0.02 in]	-
<b>Process connection &gt; 1,000 bar [&gt; 15,000 psi]</b>					
-	M16 x 1.5 female	1,600 bar [20,000 psi]	2,288 bar [33,180 psi]	2.5 mm [0.1 in]	-
-	9/16-18 UNF, female F250-C	1,600 bar [20,000 psi]	2,288 bar [33,180 psi]	2.5 mm [0.1 in]	-
<b>ANSI/ASME B1.20.1</b>	1/2 NPT	1,600 bar [20,000 psi]	2,288 bar [33,180 psi]	2.5 mm [0.1 in]	-
<b>EN 837</b>	G ½ B	1,600 bar [20,000 psi]	2,288 bar [33,180 psi]	2.5 mm [0.1 in]	Without
<b>DIN 16288</b>	M20 x 1.5	1,600 bar [20,000 psi]	2,288 bar [33,180 psi]	2.5 mm [0.1 in]	Without

1) For medium temperatures to 150 °C [302 °F] or 200 °C [392 °F] available with cooling element.

2) Wider pressure port with 6 mm [0.24 in] or 12 mm [0.48 in] only feasible for measuring ranges up to and including 0 ... 40 bar [0 ... 500 psi].

Details must be tested separately in the respective application. The specified values for the overpressure limit serve only as a rough orientation. The values depend on the temperature, the seal used, the selected torque, the type and material of the mating thread and the prevailing operating conditions.

→ Other process connections and seals on request.

→ For information on process connections, see technical information IN 00.14 at [www.wika.com](http://www.wika.com).

Further details on: process connection	
<b>Max. measuring range</b>	→ See table "Process connection"
<b>Overpressure limit</b>	→ See table "Process connection"
<b>Seal</b>	→ See table "Process connection"
<b>Pressure port diameter</b>	→ See table "Process connection"
<b>Possible restrictions</b>	Depending on the choice of seal at the process connection, there may be restrictions in the permissible temperature range
NBR	-30 ... +100 °C [-22 ... +212 °F]
FPM/FKM	-40 ... +200 °C [-40 ... +392 °F]
EPDM	-40 ... +125 °C [-40 ... +257 °F]
Copper	-40 ... +200 °C [-40 ... +392 °F]
Stainless steel	-40 ... +200 °C [-40 ... +392 °F]

Output signal		
<b>Signal type</b>		
Current (2-wire)	<ul style="list-style-type: none"> <li>■ 4 ... 20 mA</li> <li>■ 20 ... 4 mA</li> </ul>	
Voltage (3-wire)	<ul style="list-style-type: none"> <li>■ DC 0 ... 10 V</li> <li>■ DC 0 ... 5 V</li> <li>■ DC 1 ... 5 V</li> <li>■ DC 0.5 ... 4.5 V</li> <li>■ DC 1 ... 6 V</li> <li>■ DC 10 ... 0 V</li> </ul>	
Ratiometric (3-wire)	DC 0.5 ... 4.5 V	
<b>Load in <math>\Omega</math></b>		
Current (2-wire)	$\leq (\text{auxiliary power} - 7.5 \text{ V}) / 0.023 \text{ A}$	
Voltage (3-wire)	$> \text{maximum output signal} / 1 \text{ mA}$	
Ratiometric (3-wire)	$> 4.5\text{k}$	
<b>Signal damping</b>	See table "Further details on: output signal"	
<b>Signal clamping</b>		
Output signal 4 ... 20 mA	Zero point	<ul style="list-style-type: none"> <li>■ 3.6 mA</li> <li>■ 3.8 mA</li> <li>■ 4.0 mA</li> </ul>
	Full scale	<ul style="list-style-type: none"> <li>■ 20 mA</li> <li>■ 21.5 mA</li> <li>■ 23 mA</li> </ul>
Output signal DC 0 ... 10 V	Full scale	<ul style="list-style-type: none"> <li>■ DC 10 V</li> <li>■ DC 11.5 V</li> </ul>
<b>Voltage supply</b>		
Auxiliary power	Output signal 4 ... 20 mA	DC 8 ... 36 V
	Output signal 20 ... 4 mA	DC 8 ... 36 V
	Output signal DC 0 ... 10 V	DC 12 ... 36 V
	Output signal DC 0 ... 5 V	DC 8 ... 36 V
	Output signal DC 1 ... 5 V	DC 8 ... 36 V
	Output signal DC 0.5 ... 4.5 V	DC 8 ... 36 V
	Output signal DC 1 ... 6 V	DC 9 ... 36 V
	Output signal DC 10 ... 0 V	DC 12 ... 36 V
	Output signal DC 0.5 ... 4.5 V ratio	DC 5 V $\pm 10\%$
	→ With cULus approval, limited to max. DC 35 V	
Current supply	Current (2-wire)	Signal current, max. 25 mA
	Voltage (3-wire)	Max. 12 mA
Dissipation loss	Current (2-wire)	828 mW (22 mW/K derating of dissipation loss at ambient temperatures $\geq 100\text{ }^{\circ}\text{C}$ [ $\geq 212\text{ }^{\circ}\text{F}$ ])
	Voltage (3-wire)	432 mW
Overvoltage resistance	DC 40 V → Not for ratiometric output signals	
<b>Dynamic behaviour</b>		
Settling time per IEC 61298-2	→ See table "Further details on: output signal"	
Switch-on time	150 ms	
Start-up drift	5 s (60 s with optional zero point adjustment 0.1 %)	

Further details on: output signal			
Signal type	Settling time per IEC 61298-2		Signal damping
	3 dB limit frequency 500 Hz	3 dB limit frequency 1,000 Hz <sup>1)</sup>	
Current (2-wire)	3 ms	1 ms	<ul style="list-style-type: none"> <li>■ 10 ms</li> <li>■ 50 ms</li> <li>■ 100 ms</li> <li>■ 500 ms</li> <li>■ 1,000 ms</li> <li>■ 2,500 ms</li> <li>■ 5,000 ms</li> </ul>
Voltage (3-wire)	2 ms	1 ms	
Ratiometric (3-wire)	2 ms	1 ms	

1) Alternative specifications for 4 ... 20 mA output signal:  
 Load: ≤ (auxiliary power - 11.5 V) / 0.023 A  
 Auxiliary power: DC 12 ... 36 V

→ Other output signals on request.

Electrical connection					
Connection type	IP code <sup>1)</sup>	Wire cross-section	Cable diameter	Cable material	Permissible temperature
<b>Angular connector DIN EN 175301-803 A <sup>2)</sup></b>					
With mating connector	IP65	Max. 1.5 mm <sup>2</sup>	6 ... 8 mm	-	-30 ... +100 °C [-22 ... +212 °F]
With mating connector (conduit)	IP65	Max. 1.5 mm <sup>2</sup>	-	-	-30 ... +100 °C [-22 ... +212 °F]
With mating connector with moulded cable	IP65	3 x 0.75 mm <sup>2</sup>	6 mm	PUR	-30 ... +100 °C (cULus: -25 ... +85 °C) [-22 ... +212 °F (cULus: -4 ... +185 °F)]
With mating connector with moulded cable, shielded	IP65	6 x 0.5 mm <sup>2</sup>	6.8 mm	PUR	-25 ... +85 °C [-4 ... +185 °F]
<b>Angular connector DIN EN 175301-803 C <sup>2)</sup></b>					
With mating connector	IP65	Max. 0.75 mm <sup>2</sup>	4.5 ... 6 mm	-	-30 ... +100 °C [-22 ... +212 °F]
<b>Circular connector M12 x 1, 4-pin <sup>2)</sup></b>					
Without mating connector	IP67	-	-	-	-30 ... +100 °C [-22 ... +212 °F]
With straight mating connector with moulded cable	IP67	3 x 0.34 mm <sup>2</sup>	4.3 mm	PUR	-25 ... +80 °C [-4 ... +176 °F]
With straight mating connector with moulded cable, shielded	IP67	3 x 0.34 mm <sup>2</sup>	5.5 mm	PUR	-25 ... +80 °C [-4 ... +176 °F]
With angled mating connector with moulded cable	IP67	3 x 0.34 mm <sup>2</sup>	4.3 mm	PUR	-25 ... +80 °C [-4 ... +176 °F]
<b>Circular connector M12 x 1, 4-pin, metal</b>					
Without mating connector	IP67	-	-	-	-40 ... +125 °C (cULus: +85 °C) [-40 ... +257 °F (cULus: +185 °F)]
With straight mating connector with moulded cable	IP67	3 x 0.34 mm <sup>2</sup>	4.3 mm	PUR	-25 ... +80 °C [-4 ... +176 °F]
With straight mating connector with moulded cable, shielded	IP67	3 x 0.34 mm <sup>2</sup>	5.5 mm	PUR	-25 ... +80 °C [-4 ... +176 °F]
With angled mating connector with moulded cable	IP67	3 x 0.34 mm <sup>2</sup>	4.3 mm	PUR	-25 ... +80 °C [-4 ... +176 °F]
<b>Bayonet connector, 6-pin</b>	IP67	-	-	-	-40 ... +125 °C [-40 ... +257 °F]
<b>Field case</b>	IP6K9K	-	7 ... 13 mm	-	-25 ... +100 °C [-4 ... +212 °F]

Electrical connection					
Connection type	IP code 1)	Wire cross-section	Cable diameter	Cable material	Permissible temperature
<b>Cable outlet</b>					
Cable outlet IP67	IP67	3 x 0.34 mm <sup>2</sup>	5.5 mm	PUR	-30 ... +100 °C [-22 ... +212 °F]
Cable outlet ½ NPT conduit	IP67	6 x 0.35 mm <sup>2</sup>	6.1 mm	PUR	-30 ... +100 °C (cULus: +90 °C) [-22 ... +212 °F (cULus: +194 °F)]
Cable outlet IP68	IP68	6 x 0.35 mm <sup>2</sup>	6.1 mm	PUR	-30 ... +125 °C (cULus: +90 °C) [-22 ... +257 °F (cULus: +194 °F)]
Cable outlet IP68, FEP	IP68	6 x 0.39 mm <sup>2</sup>	5.8 mm	FEP	-40 ... +125 °C (cULus: +105 °C) [-40 ... +257 °F (cULus: +221 °F)]
Cable outlet IP6K9K	IP6K9K	6 x 0.35 mm <sup>2</sup>	6.1 mm	PUR	-30 ... +125 °C (cULus: +90 °C) [-22 ... +257 °F (cULus: +194 °F)]


- 1) The stated IP codes only apply when plugged in using mating connectors that have the appropriate IP code.  
2) Customer zero point adjustment available as an option.


→ Other connections on request.


Further details on: electrical connection	
Connection type	→ See table "Electrical connection"
Wire cross-section	→ See table "Electrical connection"
Cable diameter	→ See table "Electrical connection"
Pin assignment	→ See "Maximum permissible medium temperature"
Ingress protection (IP code) per IEC 60529	→ See table "Electrical connection"
Cable length	<ul style="list-style-type: none"> <li>■ 2 m</li> <li>■ 5 m</li> <li>■ 6 ft</li> <li>■ 15 ft</li> </ul>
<b>Assembly of the cable outlets</b>	
Cable outlet IP67	<ul style="list-style-type: none"> <li>■ Unfinished wire ends</li> <li>■ Tinned wire ends</li> <li>■ With end splices</li> </ul>
Cable outlet ½ NPT conduit	<ul style="list-style-type: none"> <li>■ With end splices</li> <li>■ Tinned wire ends</li> </ul>
Cable outlet IP68	<ul style="list-style-type: none"> <li>■ With end splices</li> <li>■ Tinned wire ends</li> </ul>
Cable outlet IP68, FEP	<ul style="list-style-type: none"> <li>■ With end splices</li> <li>■ Tinned wire ends</li> </ul>
Cable outlet IP6K9K	<ul style="list-style-type: none"> <li>■ With end splices</li> <li>■ Tinned wire ends</li> </ul>
Short-circuit resistance	S+ vs. U- → Not for ratiometric output signals
Reverse polarity protection	U+ vs. U- → Not for ratiometric output signals
Insulation voltage	DC 750 V


→ Other cable lengths on request.


## Pin assignment

Angular connector DIN 175301-803 A			
		2-wire	3-wire
	U+	1	1
	U-	2	2
	S+	-	3
	Shield (option)	4	4

Circular connector M12 x 1 (4-pin)			
		2-wire	3-wire
	U+	1	1
	U-	3	3
	S+	-	4
	Shield (option)	Case	Case

Angular connector DIN 175301-803 C			
		2-wire	3-wire
	U+	1	1
	U-	2	2
	S+	-	3
	Shield (option)	4	4

Field case			
		2-wire	3-wire
	U+	1	1
	U-	2	2
	S+	-	3
	Shield	5	5

Bayonet connector (6-pin)			
		2-wire	3-wire
	U+	A	A
	U-	B	B
	S+	-	C
	Shield	Case	Case


### Legend

- U+ Positive power supply terminal
- U- Negative power supply terminal
- S+ Analogue output

→ Other pin assignments on request.

Cable outlet			
		2-wire	3-wire
	U+	Brown (BN)	Brown (BN)
	U-	Blue (BU)	Blue (BU)
	S+	-	Black (BK)
	Shield <sup>1)</sup>	Grey (GY)	Grey (GY)

1) With cable outlet IP67 and cable outlet ½ NPT conduit, the shield is optional


Mating connector with moulded cable			
		2-wire	3-wire
	U+	Brown (BN)	Brown (BN)
	U-	Blue (BU)	Blue (BU)
	S+	-	Black (BK)

Material		
<b>Material (wetted)</b>		
Relative measuring ranges	Measuring ranges ≤ 25 bar [≤ 400 psi]	Stainless steel 316L
	Measuring ranges > 25 bar [> 400 psi]	Stainless steel 316L + PH grade steel
	Measuring ranges > 1,000 bar [> 15,000 psi]	ASTM 630 and PH grade steel
Absolute pressure measuring ranges	Stainless steel 316L	
Sealing materials	→ See table „Process connection“	
<b>Material (in contact with the environment)</b>		
Case	316Ti	
Electrical connection	Angular connector DIN 175301-803 A	PBT/PET GF30
	Angular connector DIN 175301-803 C	PBT/PET GF30
	Circular connector M12 x 1, 4-pin	PBT/PET GF30
	Circular connector M12 x 1, 4-pin, metal	316L
	Bayonet connector, 6-pin	316L, nickel-plated Al
	Field case	316L, 316Ti, nickel-plated brass
	Cable outlet IP67	PA66, PBT/PET GF30, PUR
	Cable outlet ½ NPT conduit	316L, PUR
	Cable outlet IP68	316L, PUR
	Cable outlet IP68, FEP	316L, FEP
Cable outlet IP6K9K	316L, PUR	
<b>Pressure transmission medium</b>	Measuring ranges ≤ 25 bar [≤ 400 psi]	Synthetic oil
	Measuring ranges > 25 bar [> 400 psi]	Dry measuring cell
	Measuring ranges ≤ 40 bar abs. [≤ 500 psi abs.]	Synthetic oil

Operating conditions		
Medium temperature limit	Ambient temperature limit	Notes
-30 ... +100 °C [-22 ... +212 °F]	-30 ... +100 °C [-22 ... +212 °F]	-
-40 ... +125 °C [-40 ... +257 °F]	-40 ... +125 °C [-40 ... +257 °F]	-
-40 ... +150 °C [-40 ... +302 °F]	-40 ... +125 °C [-40 ... +257 °F] <sup>1)</sup>	400 bar [5,000 psi] With integrated cooling element
-40 ... +200 °C [-40 ... +392 °F]	-40 ... +125 °C [-40 ... +257 °F] <sup>1)</sup>	400 bar [5,000 psi] With integrated cooling element
-20 ... +60 °C [-4 ... +140 °F]	-20 ... +60 °C [-4 ... +140 °F]	Oxygen version

1) Derating curve and formula (see following chart)

## Derating curve for cooling elements

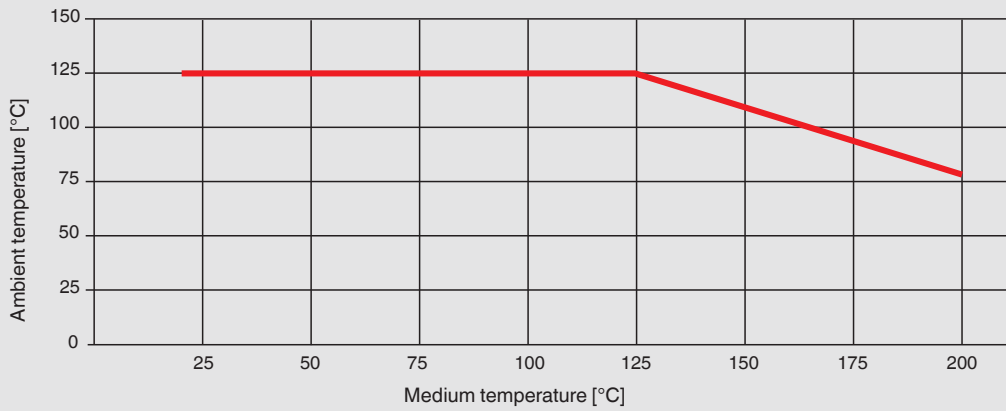

### Maximum permissible ambient temperature

$$T_{amb} (T_{med} < 125 \text{ °C}) = 125 \text{ °C}$$

$$T_{amb} (T_{med} \geq 125 \text{ °C}) = -0.62 \times T_{med} + 202 \text{ °C}$$

### Maximum permissible medium temperature

$$T_{med} (T_{amb} < 80 \text{ °C}) = 200 \text{ °C}$$

$$T_{med} (T_{amb} \geq 80 \text{ °C}) = -1.61 \times T_{amb} + 326 \text{ °C}$$

$T_{amb}$  = ambient temperature [°C]

$T_{med}$  = medium temperature [°C]

Depending on the choice of seal on the process connection and the electrical connection, there may be restrictions in the medium and ambient temperature (for restrictions, see “Process connection” and “Electrical connection”).







### Further details on: operating conditions

<b>Storage temperature limit</b>	-40 ... +70 °C [-40 ... +158 °F]
<b>Humidity per EN 60068-2-30</b>	0 ... 95 % relative humidity (non-condensing)
<b>Humidity per CSA certificate</b>	0 ... 80 % relative humidity (non-condensing)
<b>Vibration resistance per IEC 60068-2-6</b>	20g, 10 ... 2,000 Hz 40g, 10 ... 2,000 Hz for circular connector M12 x 1, metal 10g, 10 ... 2,000 Hz for instruments with cooling element
<b>Shock resistance per IEC 60068-2-27</b>	100g, 6 ms 500g, 1 ms for circular connector M12 x 1, metal
<b>Operating altitude</b>	≤ 2,000 m above seal level
<b>Ingress protection (IP code) per IEC 60529</b>	→ See “Electrical connection”
<b>Pollution degree</b>	2
<b>Overvoltage category</b>	I
<b>Service life</b>	
Measuring ranges < 600 bar [< 7,500 psi]	100 million load cycles
Measuring ranges ≥ 600 bar [≥ 7,500 psi]	10 million load cycles

Options for special media		
<b>Food</b>	Food-compatible transmission fluid	
<b>Oil- and grease-free</b>		
Residual hydrocarbon	< 1,000 mg/m <sup>2</sup>	
Packaging	Protective cap on the process connection	
<b>Oxygen, oil- and grease-free</b>		
Residual hydrocarbon	Measuring ranges < 30 bar [< 435 psi]	< 500 mg/m <sup>2</sup>
	Measuring ranges > 30 bar [> 435 psi]	< 200 mg/m <sup>2</sup>
Medium temperature limit	-20 ... +60 °C [-4 ... +140 °F]	
Max. measuring range	400 bar [5,000 psi]	
Overpressure limit	2 times	
Leakage rate	< 1*10 <sup>-6</sup> mbar*/s	
Influence of mounting position (measuring ranges ≤ 1 bar)	Mounting position 180°, vertical, top process connection	≤ 1.4 mbar [≤ 0.02 psi]
	Mounting position 90°, horizontal, lateral process connection	≤ 0.8 mbar [≤ 0.012 psi]
Packaging	Protective cap on the process connection	
<b>Hydrogen, oil- and grease-free</b>		
Measuring ranges	0.4 bar ... 1,000 bar [10 psi ... 15,000 psi]	
Material (wetted)	316L and Elgiloy® (2.4711)	
Residual hydrocarbon	< 1,000 mg/m <sup>2</sup>	
Leakage rate	< 1*10 <sup>-6</sup> mbar*/s	
	→ For further information, see technical information IN 00.40 on the website.	
<b>Water (increased stability)</b>		
Measuring ranges	10 ... 25 bar [150 ... 400 psi]	
<b>Dry measuring cell</b>		
Measuring ranges	10 bar ... 25 bar [150 psi ... 360 psi]	
Overpressure limit	2 times	

Packaging and instrument labelling	
<b>Packaging</b>	Individual packaging
<b>Instrument labelling</b>	<ul style="list-style-type: none"> <li>■ WIKA product label, lasered</li> <li>■ Customised product label on request</li> </ul>

## Approvals

Logo	Description	Country
	<b>EU declaration of conformity</b>	European Union
	EMC Directive	
	Pressure Equipment Directive	
	RoHS directive	
	<b>UL</b> Safety (e.g. electr. safety, overpressure, ...)	USA and Canada
	<b>EAC</b> EMC Directive	Eurasian Economic Community
	<b>KazInMetr</b> Metrology, measurement technology	Kazakhstan
-	<b>MTSCHS</b> Permission for commissioning	Kazakhstan
	<b>UkrSEPRO</b> Metrology, measurement technology	Ukraine
	<b>Uzstandard</b> Metrology, measurement technology	Uzbekistan
-	<b>CRN</b> Safety (e.g. electr. safety, overpressure, ...)	Canada

## Manufacturer's information

Logo	Description
-	<b>China RoHS directive</b>
MTTF	> 100 years

## Test report

Test report	
Non-linearity 0.5 %	3 measuring points
Non-linearity 0.25 %	5 measuring points
Non-linearity 0.125 %	5 measuring points


## Certificates (option)

Certificates	
<b>Certificates</b>	<ul style="list-style-type: none"> <li>■ 2.2 test report per EN 10204 (e.g. state-of-the-art manufacturing, material proof, indication accuracy)</li> <li>■ 3.1 inspection certificate per EN 10204 (e.g. material proof for wetted metal parts, indication accuracy, calibration certificate)</li> </ul>
<b>Calibration</b>	<ul style="list-style-type: none"> <li>■ Factory calibration certificate</li> <li>■ DAkkS calibration certificate (traceable and accredited in accordance with ISO/IEC 17025)</li> </ul>
<b>Recommended calibration interval</b>	1 year (dependent on conditions of use)

→ For approvals and certificates, see website


# Dimensions in mm [in]

Angular connector DIN EN 175301-803 A

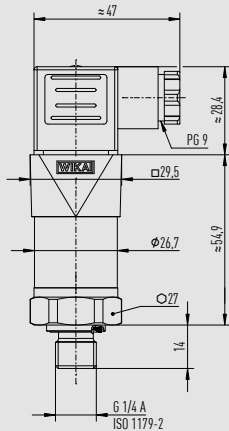


Weight: approx. 150 g [0.331 lb]

Angular connector DIN EN 175301-803 C

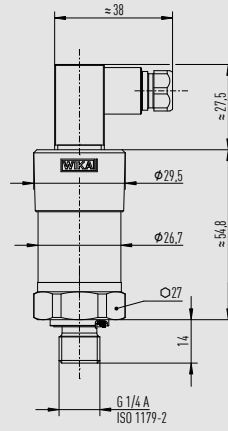


Weight: approx. 150 g [0.331 lb]

Angular connector DIN 175301-803 A with zero point adjustment ring

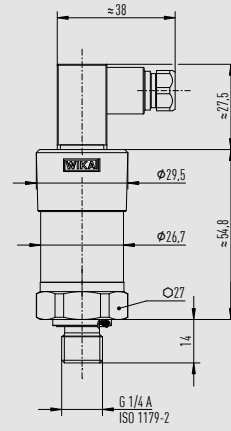


Weight: approx. 150 g [0.331 lb]

Circular connector M12 x 1 (4-pin)

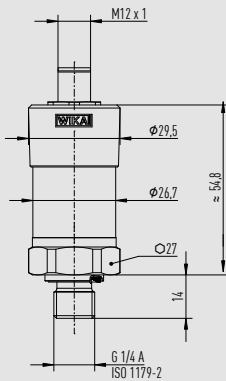


Weight: approx. 150 g [0.331 lb]

Circular connector M12 x 1 (4-pin, metallic)

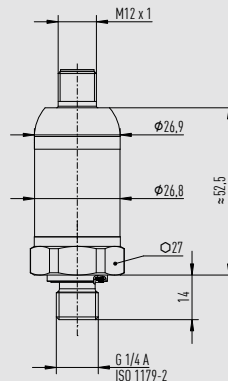


Weight: approx. 150 g [0.331 lb]

Bayonet connector (6-pin)




Weight: approx. 150 g [0.331 lb]

Cable outlet IP68, FEP, IP6K9K

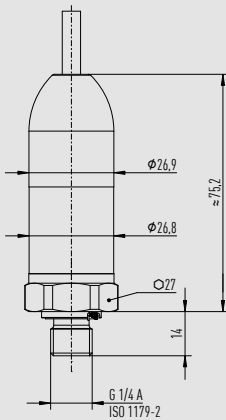


Weight: approx. 220 g [0.485 lb]

Cable outlet 1/2 NPT conduit

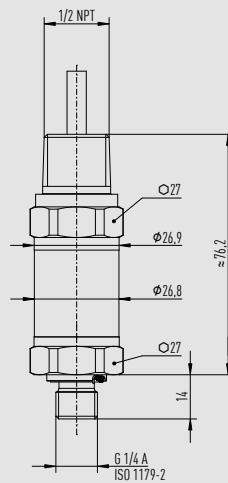

Weight: approx. 220 g [0.485 lb]

Cable outlet IP67

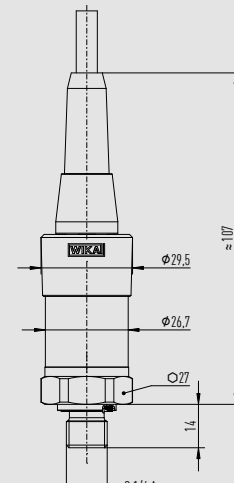

Weight: approx. 150 g [0.331 lb]



## Accessories and spare parts

Description	Version	Order number
<b>Mating connector</b>		
Angular connector DIN 175301-803 A	Gland PG9	11427567
	With 2 m cable	11225793
	With 2 m cable, shielded	14100465
	With 5 m cable	11250186
	Conduit ½ NPT	11022485
Angular connector DIN 175301-803 C	Gland PG7	1439081
Circular connector M12 x 1, 4-pin, straight	With 2 m cable	11250780
	With 5 m cable	11250259
	With 2 m cable, shielded	14056584
Circular connector M12 x 1, 4-pin, angled	With 2 m cable	11250798
	With 5 m cable	11250232
<b>Seals for mating connector</b>		
Angular connector DIN EN 175301-803 A	Blue (WIKA)	1576240
	Brown (neutral)	11437902
Angular connector DIN 175301-803 C	Blue (WIKA)	11169479
	Brown (neutral)	11437881
<b>Seals for process connection</b>		
G ⅛ B EN 837	Copper	11251051
G ¼ B EN 837	Copper	11250810
	Stainless steel	11250844
G ⅜ B EN 837	Copper	11250861
G ½ B EN 837	Copper	11250861
	Stainless steel	11251042
G ¼ A DIN EN ISO 1179-2	NBR	1537857
	FKM/FPM	1576534
G ½ A DIN EN ISO 1179-2	NBR	1039067
	FKM	1039075
M14 x 1.5 DIN EN ISO 9974-2	NBR	1537857
	FKM	1576534
M12 x 1.5 DIN 16288	Copper	11250810
	Stainless steel	11250844
M20 x 1.5 DIN 16288	Copper	11250861
	Stainless steel	11251042
7/16-20 UNF BOSS SAE J514	NBR	14057554
	FKM	11472022
9/16-18 UNF BOSS SAE J514	NBR	14057555
	FKM	2063240

→ Only use the accessories listed above, otherwise it could lead to the loss of the approval.

## Ordering information

Model / Measuring range / Overpressure limit / Output signal / Non-linearity / Adjustment temperature / Zero point setting / Process connection / Pressure port / Seal / Electrical connection / Assembly / Cable length / Shielding / Certificates / Packaging / Instrument labelling / Accessories and spare parts



© 04/2013 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.  
The specifications given in this document represent the state of engineering at the time of publishing.  
We reserve the right to make modifications to the specifications and materials.  
In case of a different interpretation of the translated and the English data sheet, the English wording shall prevail.

