

Model 266MST Differential Model 266RST Absolute

2600T Series Pressure Transmitters

Engineered solutions for all applications



Base accuracy

- 0.04 % of calibrated span, (Option 0.025 %)

Reliable sensing system coupled with very latest digital technologies

- provides large turn down ratio up to 100:1

Comprehensive sensor choice

- optimize in-use total performance and stability

10-year stability

- 0.15 % of URL

Flexible configuration facilities

- provided locally via local LCD keypad

New TTG (Through-The-Glass) keypad technology

- allows quick and easy local configuration without opening the cover, even in explosion proof environments

IEC 61508 certification

- for SIL2 (1oo1) and SIL3 (1oo2) applications

Full compliance with PED Category III

Model 266MST Differential

Model 266RST Absolute

Functional Specifications

Range and span limits

Sensor Code	Upper Range Limit (URL)	Lower Range Limit (LRL)		Minimum span	
		Model 266MST differential	Model 266RST absolute	Model 266MST differential	Model 266RST absolute
A	1 kPa 10 mbar 4 inH ₂ O	-1 kPa -10 mbar -4 inH ₂ O	–	0.05 kPa 0.5 mbar 0.2 inH ₂ O	–
C	6 kPa 60 mbar 24 inH ₂ O	-6 kPa -60 mbar -24 inH ₂ O	–	0.2 kPa 2 mbar 0.8 inH ₂ O	–
F	40 kPa 400 mbar 160 inH ₂ O	-40 kPa -400 mbar -160 inH ₂ O	0 abs	0.4 kPa 4 mbar 1.6 inH ₂ O	2 kPa 20 mbar 15 mmHg
L	250 kPa 2500 mbar 1000 inH ₂ O	-250 kPa -2500 mbar -1000 inH ₂ O	0 abs	2.5 kPa 25 mbar 10 inH ₂ O	12.5 kPa 125 mbar 93.76 mmHg
N	2000 kPa 20 bar 290 psi	-2000 kPa -20 bar -290 psi	0 abs	20 kPa 0.2 bar 2.9 psi	100 kPa 1 bar 14.5 psi
R	10000 kPa 100 bar 1450 psi	-10000 kPa -100 bar -1450 psi	–	100 kPa 1 bar 14.5 psi	–

Second sensor of 266MST differential pressure transmitter for absolute pressure measurement

Measuring range: 41 MPa, 410 bar, 5945 psi
(2 MPa, 20 bar, 290 psi for sensor code A)

Span limits

Maximum span = URL
(can be further adjusted up to $\pm$ URL (TD = 0.5) for differential models, within the range limits)

Important

It is recommended to select the transmitter sensor code providing the turndown value as lowest as possible to optimize performance characteristics.

Recommendation for square root function

At least 10 % of upper range limit (URL)

Zero suppression and elevation

Zero and span can be adjusted to any value within the range limits detailed in the table as long as:
— calibrated span $\geq$ minimum span

Damping

Selectable time constant between 0 and 60 s
This is in addition to sensor response time

Turn on time

Operation within specification in less than 10 s with minimum damping.

Insulation resistance

> 100 M Ω at 500 V DC (terminals to earth)

Operative limits

Pressure limits

Overpressure limits

Transmitters for differential pressure model 266MST operate without damage between the following limits:

Sensors	Fill fluid	Overpressure limits
Sensor A	Silicone oil	0.5 kPa abs., 5 mbar abs., 0.07 psia and 2 MPa, 20 bar, 290 psi
Sensor A	Inert (Galden)	40 kPa abs., 400 mbar abs., 5.8 psia and 2 MPa, 20 bar, 290 psi
Sensor C to R	Silicone oil	0.5 kPa abs., 5 mbar abs., 0.07 psia and 16 MPa, 160 bar, 2320 psi, or 25 MPa, 250 bar, 3625 psi, or 41 MPa, 410 bar, 5945 psi depending on code variant selected ¹
Sensor C to R	Inert (Galden)	40 kPa abs., 400 mbar abs., 5.8 psia and 16 MPa, 160 bar, 2320 psi, or 25 MPa, 250 bar, 3625 psi, or 41 MPa, 410 bar, 5945 psi depending on code variant selected ¹

¹ 1 MPa, 10 bar, 145 psi for Kynar-PVDF

Transmitters for absolute pressure model 266RST operate without damage between the following limits:

Sensors	Fill fluid	Over pressure limits
Sensor F to N	Silicone oil	0 abs. and 16 MPa, 160 bar, 2320 psi, or 25 MPa, 250 bar, 3625 psi, or 41 MPa, 410 bar, 5945 psi

Static pressure limits

Transmitters for differential pressure model 266MST operate within specifications between the following limits:

Sensors	Fill fluid	Static pressure limits
Sensor A	Silicone oil	3.5 kPa abs., 35 mbar abs., 0.5 psia and 2 MPa, 20 bar, 290 psi
Sensor A	Inert (Galden)	40 kPa abs., 400 mbar abs., 5.8 psia and 2 MPa, 20 bar, 290 psi
Sensor C to R	Silicone oil	3.5 kPa abs., 35 mbar abs., 0.5 psia and 16 MPa, 160 bar, 2320 psi, or 25 MPa, 250 bar, 3625 psi, or 41 MPa, 410 bar, 5945 psi depending on code variant selected ¹
Sensor C to R	Inert (Galden)	40 kPa abs., 400 mbar abs., 5.8 psia and 16 MPa, 160 bar, 2320 psi, or 25 MPa, 250 bar, 3625 psi, or 41 MPa, 410 bar, 5945 psi depending on code variant selected ¹

¹ 1 MPa, 10 bar, 145 psi for Kynar-PVDF

Transmitters for absolute pressure model 266RST operate within specifications between the following limits:

Sensors	Fill fluid	Static pressure limits
Sensor F to N	Silicone oil	0 abs. and 16 MPa, 160 bar, 2320 psi, or 25 MPa, 250 bar, 3625 psi, or 41 MPa, 410 bar, 5945 psi

Proof pressure

The transmitters can be exposed without leaking to line pressure:

266MST, up to 1.5 times the nominal pressure simultaneously on both sides

266RST, up to 1 time the normal pressure

Meet ANSI/ISA-S 82.03 hydrostatic test requirements.

Model 266MST Differential

Model 266RST Absolute

Temperature limits °C (°F)

Ambient

Is the operating temperature.

Model 266MST – 266RST	Ambient temperature limits
Silicone oil	-40 and 85 °C (-40 and 185 °F)
Inert (Galden)	-40 and 85 °C (-40 and 185 °F)

Important

For Hazardous Atmosphere applications see the temperature range specified on the certificate / approval relevant to the aimed type of protection.

Model 266MST – 266RST	Ambient temperature limits
LCD integral display	-40 and 85 °C (-40 and 185 °F)
Viton gasket	-20 and 85 °C (-4 and 185 °F)
PTFE gaskets	-20 and 85 °C (-4 and 185 °F)

LCD display may not be clearly readable below –20 °C (–4 °F) or above 70 °C (158 °F).

Process

Model 266MST	Process temperature limits
Silicone oil	-40 and 121 °C (-40 and 250 °F) ¹
Inert (Galden)	-40 and 121 °C (-40 and 250 °F) ²
Viton gaskets	-20 and 121 °C (-4 and 250 °F)
PTFE gaskets	-20 and 85 °C (-4 and 185 °F)

- 1 85 °C (185 °F) for application below 10 kPa, 100 mbar abs., 1.45 psia down to 3.5 kPa abs., 35 mbar abs., 0.5 psia
- 2 85 °C (185 °F) for application below atmospheric pressure down to 40 kPa abs., 400 mbar abs., 5.8 psia

Model 266RST	Process temperature limits
Silicone oil	-40 and 121 °C (-40 and 250 °F) ¹
Viton gaskets	-20 and 121 °C (-4 and 250 °F)
PTFE gaskets	-20 and 85 °C (-4 and 185 °F)

- 1 85 °C (185 °F) for application below 10 kPa, 100 mbar abs, 1.45 psia

Storage

Model 266MST – 266RST	Storage temperature limits
Storage limits	-50 and 85 °C (-58 and 185 °F)
LCD integral display	-40 and 85 °C (-40 and 185 °F)

	Humidity during storage
Relative humidity	Up to 75 %

Environmental limits

Electromagnetic compatibility (EMC)

Comply with EN 61326 and Namur NE-21 Surge immunity level (with surge protector): 4 kV (according to IEC 1000-4-5 EN 61000-4-5)

Pressure equipment directive (PED)

Instruments with a maximum operating pressure of 25 MPa, 250 bar, 3625 psi, or 41 MPa, 410 bar, 5945 psi, comply with Directive 97/23/EC Category III, module H.

Humidity

Relative humidity: up to 100 %
Condensing, icing: admissible

Vibration resistance

Accelerations up to 2 g at frequency up to 1000 Hz (according to IEC 60068-2-6)

Shock resistance

Acceleration: 50 g
Duration: 11 ms
(according to IEC 60068-2-27)

Wet and dust-laden atmospheres

The transmitter is dust and sand tight and protected against immersion effects as defined by EN 60529 (1989) to IP 67 (IP 68 on request) or by NEMA to 4X or by JIS to C0920. IP 65 with Harting Han connector.

Hazardous atmospheres

With or without integral display

INTRINSIC SAFETY:

ATEX Europe (code E1) and IEC Ex (code E8) approval

II 1 G Ex ia IIC T6 and

II 1/2 G Ex ia IIC T6 (−40 °C ≤ Ta ≤ +40 °C);

II 1 D Ex iaD 20 T 95° C and

II 1/2D Ex iaD 21 T95° C

EXPLOSION PROOF:

ATEX Europe (code E2) and IEC Ex (code E9) approval

II 1/2 G Ex d IIC T6 and

II 1/2 D Ex tD A21 IP67 T85° C

TYPE "N":

ATEX Europe (code E3) and IEC Ex (code ER)

type examination

II 3 G Ex nL IIC T6 and

II 3 D Ex tD A22 IP67 T85° C

FM Approvals US (code E6) and

FM Approvals Canada (code E4):

— Explosionproof (US): Class I, Div. 1, Groups A, B, C, D

— Explosionproof (Canada): Class I, Div. 1, Groups B, C, D

— Dust ignitionproof : Class II, Div. 1, Groups E, F, G

Class II, Div. 2, Groups F,

Class III, Div.1, 2

— Nonincendive: Class I, Div. 2, Groups A, B, C, D

— Intrinsically safe: Class I, II, III, Div. 1, Groups A, B, C, D, E, F, G

Class I, Zone 0 AEx ia IIC T6/T4, Zone 0 (FM US)

Class I, Zone 0 Ex ia IIC T6/T4, Zone 0 (FM Canada)

COMBINED ATEX (code EW = E1 + E2 + E3)

COMBINED ATEX and FM Approvals (code EN = EW + E4 + E6)

COMBINED FM Approvals US and Canada

— Intrinsically safe (code EA)

— Explosionproof (code EB)

— Nonincendive (code EC)

— GOST (Russia), GOST (Kazakhstan), Inmetro (Brazil) based on ATEX

Model 266MST Differential

Model 266RST Absolute

Electrical Characteristics and Options

HART digital communication and 4 to 20 mA output Power supply

The transmitter operates from 10.5 to 42 V DC with no load and is protected against reverse polarity connection (additional load allows operations over 42 V DC).

For Ex ia and other intrinsically safe approval power supply must not exceed 30 V DC.

Minimum operating voltage increase to 12.3 V DC with optional surge protector

Ripple

20 mV max on a 250 Ω load as per HART specifications.

Load limitations

4 to 20 mA and HART total loop resistance:

$$R \text{ (k}\Omega\text{)} = \frac{\text{Voltage supply} - \text{Minimum operating voltage (V DC)}}{22 \text{ mA}}$$

A minimum of 250 Ω is required for HART communication.

Optional indicators

Integral display (code L1)

Wide screen LCD, 128 x 64 pixel,

52.5 x 27.2 mm (2.06 x 1.07 in.) dot matrix. Multilanguage.

Four keys for configuration and management of device.

Easy setup for quick commissioning.

User selectable application-specific visualizations.

Totalized and instantaneous flow indication.

Display may also indicate static pressure, sensor temperature and diagnostic messages and provides configuration facilities.

Through-the-glass (TTG) controlled display (code L5)

As above integral display but equipped with the innovative TTG keypad allowing the activation of the configuration and management menus of the device without the need of removing the transmitter housing cover.

TTG keypad is protected against accidental activations.

Optional surge protection

Up to 4 kV

— voltage: 1.2 μ s rise time / 50 μ s delay time to half value

— current: 8 μ s rise time / 20 μ s delay time to half value

Output signal

Two-wire 4 to 20 mA, user-selectable for linear or square root output, power of 3/2 or 5/2, square root for bidirectional flow, 22 points linearization table (i.e. for horizontal or spherical tank level measurement).

HART communication provides digital process variable superimposed on 4 to 20 mA signal, with protocol based on Bell 202 FSK standard.

Output current limits (to NAMUR standard)

Overload condition

— Lower limit: 3.8 mA (configurable from 3.8 to 4 mA)

— Upper limit: 20.5 mA (configurable from 20 to 21 mA)

Alarm current

— Lower limit: 3.6 mA (configurable from 3.6 to 4 mA)

— Upper limit: 21 mA (configurable from 20 to 22 mA)

Factory setting: high alarm current

Process diagnostics (PILD)

Plugged impulse line detection (PILD) generates a warning via HART communication. The device can also be configured to drive the analog output signal to the "Alarm current".

FOUNDATION Fieldbus output

Device type

LINK MASTER DEVICE

Link Active Scheduler (LAS) capability implemented.

Manufacturer code: 000320 (hex)

Device type code: 0007 (hex)

Power supply

The transmitter operates from 9 to 32 V DC, polarity independent, with or without surge protector.

For EEx ia approval power supply must not exceed 24 V DC (entity certification) or 17.5 V DC (FISCO certification), according to FF-816.

Current consumption

Operating (quiescent): 15 mA

Fault current limiting: 20 mA max.

Output signal

Physical layer in compliance to IEC 1158 2 / EN 61158 2 with transmission to Manchester II modulation, at 31.25 kbit/s

Function blocks / execution period

- 3 enhanced Analog Input blocks / 25 ms max (each)
- 1 enhanced PID block / 40 ms max.
- 1 standard Arithmetic block / 25 ms
- 1 standard Input Selector block / 25 ms
- 1 standard Control Selector block / 25 ms
- 1 standard Signal Characterization block / 25 ms
- 1 standard Integrator / Totalizer block / 25 ms

Additional blocks

- 1 enhanced Resource block
- 1 custom Pressure with calibration transducer block
- 1 custom Advanced Diagnostics transducer block including Plugged Input Line Detection
- 1 custom Local Display transducer block

Number of link objects

35

Number of VCRs

35

Output interface

FOUNDATION Fieldbus digital communication protocol to standard H1, compliant to specification V. 1.7; FF registration in progress.

Integral display

Wide screen LCD, 128 x 64 pixel,

52.5 x 27.2 mm (2.06 x 1.07 in.) dot matrix. Multilanguage.

Four keys for configuration and management of device.

Easy setup for quick commissioning.

User selectable application-specific visualizations.

Totalized and instantaneous flow indication.

Display may also indicate static pressure, sensor temperature and diagnostic messages and provides configuration facilities.

Transmitter failure mode

The output signal is "frozen" to the last valid value on gross transmitter failure condition, detected by self-diagnostics which also indicate a BAD conditions.

If electronic failure or short circuit occur the transmitter consumption is electronically limited at a defined value (20 mA approx), for safety of the network.

Model 266MST Differential

Model 266RST Absolute

PROFIBUS PA output

Device type

Pressure transmitter compliant to Profiles 3.0.1
Identification number: 3450 (hex)

Power supply

The transmitter operates from 9 to 32 V DC, polarity independent, with or without surge protector.
For EEx ia approval power supply must not exceed 17.5 V DC.
Intrinsic safety installation according to FISCO model.

Current consumption

Operating (quiescent): 15 mA
Fault current limiting: 20 mA max.

Output signal

Physical layer in compliance to IEC 1158-2 / EN 61158-2 with transmission to Manchester II modulation, at 31.25 kbit/s

Output interface

PROFIBUS PA communication according to PROFIBUS DP 50170 part 2 / DIN 19245 part 1-3.

Output update time

25 ms

Function blocks

3 analog input
3 transducer
1 physical

Integral display

Wide screen LCD, 128 x 64 pixel,
52.5 x 27.2 mm (2.06 x 1.07 in.) dot matrix. Multilanguage.
Four keys for configuration and management of device.
Easy setup for quick commissioning.
User selectable application-specific visualizations.
Instantaneous flow indication.
Display may also indicate static pressure, sensor temperature and diagnostic messages and provides configuration facilities.

Transmitter failure mode

On gross transmitter failure condition, detected by self-diagnostics, the output signal can be driven to defined conditions, selectable by the user as safe, last valid or calculated value.

If electronic failure or short circuit occur the transmitter consumption is electronically limited at a defined value (20 mA approx), for safety of the network.

Performance specifications

Stated at reference condition to IEC 60770 ambient temperature of 20 °C (68 °F), relative humidity of 65 %, atmospheric pressure of 1013 hPa (1013 mbar), mounting position with vertical diaphragm and zero based range for transmitter with isolating diaphragms in AISI 316 L ss or Hastelloy and silicone oil fill and HART digital trim values equal to 4 and to 20 mA span end points, in linear mode.

Unless otherwise specified, errors are quoted as % of span. Some performance referring to the Upper Range Limit are affected by the actual turndown (TD) as ratio between Upper Range Limit (URL) and calibrated span.

IT IS RECOMMENDED TO SELECT THE TRANSMITTER SENSOR CODE PROVIDING THE TURNDOWN VALUE AS LOWEST AS POSSIBLE TO OPTIMIZE PERFORMANCE CHARACTERISTICS.

Dynamic performance (according to IEC 61298-1 definition)

Sensors	Time constant (63.2 % of total step change)
Sensor F to R	150 ms
Sensor C	400 ms
Sensor A	1000 ms
Dead time for all sensors	40 ms

Response time (total) = dead time + time constant

Accuracy rating

% of calibrated span, including combined effects of terminal based linearity, hysteresis and repeatability.

For fieldbus versions SPAN refer to analog input function block outscale range

Model	Sensor	For TD up to	
266MST	A to R	from 1:1 to 10:1	± 0.04 %
	A	from 10:1 to 20:1	± (0.04 + 0.005 x TD – 0.05) %
	C	from 10:1 to 30:1	± (0.04 + 0.005 x TD – 0.05) %
	F to R	from 10:1 to 100:1	± (0.04 + 0.005 x TD – 0.05) %
266MST	F to N	from 1:1 to 10:1	± 0.025 % (Option)
266RST	F to N	from 1:1 to 10:1	± 0.04 %
	F to N	from 10:1 to 20:1	± (0.04 + 0.005 x TD – 0.05) %

Model	Pabs-Sensor (second sensor for 266MST) range 41 MPa, 410 bar, 5945 psi, (2 MPa, 20 bar, 290 psi for dp-Sensor Code A)		
266MST	C to R		80 kPa, 800 mbar, 321 inH ₂ O
	A		1.2 kPa, 12 mbar, 4.8 inH ₂ O

Ambient temperature

per 20 K change between the limits of -40 to 85 °C
(per 36 °F change between the limits of -40 to 185 °F):

Model	Sensor	For TD up to	
266MST	A	10:1	± (0.06 % URL + 0.045 % span)
	C to R	10:1	± (0.03 % URL + 0.045 % span)
266RST	F to N	10:1	± (0.05 % URL + 0.08 % span)

for an ambient temperature change from -10 °C to 60 °C
(14 to 140 °F):

Model	Sensor	For TD up to	
266MST	A	10:1	± (0.12 % URL + 0.05 % span)
	C to R	10:1	± (0.06 % URL + 0.05 % span)
266RST	F to N	10:1	± (0.1 % URL + 0.1 % span)

per 10 K change between the limits of -40 to -10 °C or
60 to 85 °C (per 18 °F change between the limits of
-40 to 14 °F or 140° to 185 °F):

Model	Sensor	For TD up to	
266MST	A	10:1	± (0.05 % URL + 0.03 % span)
	C to R	10:1	± (0.025 % URL + 0.03 % span)
266RST	F to N	10:1	± (0.05 % URL + 0.05 % span)

Model 266MST Differential

Model 266RST Absolute

Model 266MST / Absolute pressure sensor

For the entire temperature range of 125 K,
between the limits of -40 °C to 85 °C:

— Zero signal

For sensors C to R:

40 kPa, 400 mbar, 160 inH₂O

(absolute pressure sensor 41MPa, 410 bar, 5945 psi)

For sensor A:

0.6 kPa, 6 mbar, 2.4 inH₂O

(absolute pressure sensor 0.6 MPa, 6 bar, 87 psi)

— Span

For sensors C to R:

0.3 kPa, 3 bar, 43.5 psi

(absolute pressure sensor 41 MPa, 410 bar, 5945 psi)

For sensor A:

4.5 kPa, 45 mbar, 18 inH₂O

(absolute pressure sensor 0.6 MPa, 6 bar, 87 psi)

Static pressure

(zero errors can be calibrated out at line pressure)

Measuring range	Sensor A	Sensor C, F, L, N	Sensor R
Zero error	Up to 2 bar: 0.05 % URL	Up to 100 bar: 0.05 % URL	Up to 100 bar: 0.1 % URL
	> 2 bar: 0.05 % URL/bar	> 100 bar: 0.05 % URL/100 bar	> 100 bar: 0.1 % URL/100 bar
Span error	Up to 2 bar: 0.05 % span	Up to 100 bar: 0.05 % span	Up to 100 bar: 0.1 % span
	> 2 bar: 0.05 % span/bar	> 100 bar: 0.05 % span/100 bar	> 100 bar: 0.1 % span/100 bar

Supply voltage

Within voltage / load specified limits the total effect is less
than 0.005 % of URL per volt.

Load

Within load / voltage specified limits the total effect is
negligible.

Electromagnetic field

Meets all the requirements of EN 61326 and NAMUR NE-21.

Common mode interference

No effect from 100 V rms @ 50 Hz, or 50 V DC

Mounting position

No effect for rotation on diaphragm plane. A tilt up to 90° from
vertical causes a zero shifts up to 0.35 kPa, 3.5 mbar or
1.4 inH₂O, which can be corrected with zero adjustment. No
span effect.

Stability

Sensor C to R:

± 0.15 % of URL over ten years period (± 0.05 % URL/year)

Sensor A:

± 0.3 % of URL over ten years period (± 0.2 % URL/year)

Total performance

similar to DIN 16086

Temperature change in the range from -10 to 60 °C
(14 to 140 °F),

266MST only: up to 10 MPa, 100 bar, 1450 psi static
pressure

Model	Sensor	For TD up to	Total performance (measurement deviation 0.04 %)
266MST	C to R	1:1	± 0.137 % of calibrated span
266RST	F to N	1:1	± 0.2 % of calibrated span

The indication of Total performance includes the measurement
deviation non-linearity including hysteresis and non-
reproducibility, the thermal change in the ambient temperature
on the zero signal and span, as well as (only 266MST) the
effect of the static pressure on the zero signal and span.

$$E_{perf} = \sqrt{(E_{\Delta g1} + E_{\Delta g2})^2 + E_{Pstat1}^2 + E_{Pstat2}^2 + E_{lin}^2}$$

E_{perf} = Total Performance

$E_{\Delta g1}$ = Effect of the ambient temperature on zero signal

$E_{\Delta g2}$ = Effect of the ambient temperature on span

E_{Pstat1} = Effect of the static pressure on zero signal
(266MST only)

E_{Pstat2} = Effect of the static pressure on the span
(266MST only)

E_{lin} = Accuracy rating (for terminal-based linearity 0.04 %)

Physical specification

(Refer to ordering information sheets for variant availability related to specific model or versions code)

Materials

Process isolating diaphragms¹

AISI 316L ss (1.4435);
Hastelloy C276;
Monel 400; Monel 400 gold plated; Tantalum

Process flanges, adapters, plugs and drain/vent valves¹

AISI 316L ss (1.4404 / 1.4408);
Hastelloy C276;
Monel 400; Kynar (PVDF insert in AISI 316L ss flange)

Blind flange (reference side of 266RST)

AISI 316L ss (1.4404)

Sensor fill fluid

Silicone oil, Inert fill (Galden)

Mounting bracket²

Zinc plated carbon steel with chrome passivation;
AISI 316 L ss.

Gaskets¹

Viton (FPM); Perbunan (NBR); EPDM; PTFE or FEP-coated
Viton (only for PVDF-Kynar process connection or sensor A);
Graphite

Sensor housing

AISI 316L ss (1.4404)

Bolts and nuts

AISI 316 ss bolts and nuts, Class A4-70 per
UNI 7323 (ISO 3506), in compliance with
NACE MR0175 Class II.

Electronic housing and covers

Aluminium alloy (copper content ≤ 0.3 %) with baked epoxy
finish (colour RAL9002); AISI 316L ss.

Covers O-ring

Buna N (perbunan)

Local adjustments (zero, span and write protect)

Glass filled polyphenylene oxyde (removable)

Plates

AISI 316 ss for transmitter nameplate, certification plate,
optional tag / calibration plate attached to the electronics
housing and optional wired-on customer data plate. All
printing by laser.

¹ Wetted parts of the transmitter.

² U-bolt material: AISI 400 ss; screws material: high-strength alloy steel or
AISI 316 ss.

Calibration

Standard:

— At maximum span, zero based range, ambient temperature
and pressure

Optional:

— At specified range and ambient conditions

Optional extras

Mounting brackets

For vertical and horizontal 60 mm (2 in.) pipes or wall
mounting

LCD display

4-position (at 90°) user orientable

Optional plates

Code I2: for tag (up to 31 characters) and calibration details
(up to 31 characters: lower and upper values plus unit) fixed
onto transmitter housing

Code I1: for customer data (32 character x 4 lines) wired-on
transmitter housing

Surge protection

Cleaning procedure for oxygen service

Test certificates (test, design, calibration, material traceability)

Tag and manual language

Communication connectors

Model 266MST Differential

Model 266RST Absolute

Process connections

On flanges: 1/4–18 NPT on process axis

On adapters: 1/2–14 NPT on process axis

Centre distance (266MST):

54 mm (2.13 in.) on flanges; 51 mm, 54 mm or 57 mm
(2.01 in., 2.13 in. or 2.24 in.) as per adapters fittings

Fixing threads:

7/16–20 UNF at 41.3 mm centre distance or for DIN 19213
connection (Process Flanges code C):

M10 for operating pressures up to 16 MPa, 160 bar, 2320 psi
resp.

M12 for higher operating pressures up to 41 MPa, 410 bar,
6000 psi

Electrical connections

Two 1/2-14 NPT or M20 x 1.5 threaded conduit entries, direct
on housing.

Special communication connector (on request)

- HART: straight or angle Harting Han 8D connector and one
plug
- FOUNDATION Fieldbus, PROFIBUS PA: M12 x 1 or 7/8 in.

Terminal block

HART version: three terminals for signal / external meter wiring
up to 2.5 mm² (14 AWG), also connection points for test and
communication purposes

Fieldbus versions: two terminals for signal wiring (bus
connection) up to 2.5 mm² (14 AWG)

Grounding

Internal and external 6 mm² (10 AWG) ground termination
points are provided.

Mounting position

Transmitter can be mounted in any position.

Electronics housing may be rotated to any position. A positive
stop prevents over travel.

Mass

(without options)

3.7 kg approx. (8.2 lb); add 1.5 kg (3.3 lb) for AISI housing.

Add 650 g (1.5 lb) for packing

Packing

Carton 28 x 23 x 24 cm, approx. (11 x 9 x 9 in.)

Configuration

Transmitter with HART communication and 4 to 20 mA Standard configuration

Transmitters are factory calibrated to customer's specified range. Calibrated range and tag number are stamped on the tag plate. If a calibration range and tag data are not specified, the transmitter will be supplied with the plate left blank and configured as follows:

Engineering Unit	kPa
4 mA	Zero
20 mA	Upper Range Limit (URL)
Output	Linear
Damping	1 s
Transmitter failure mode	Upscale
Software tag (8 characters max)	Blank
Optional LCD display	PV in kPa; output in mA and in percentage on bargraph

Any or all the above configurable parameters, including Lower range-value and Upper range-value which must be the same unit of measure, can be easily changed using the HART handheld communicator or by a PC running the configuration software with DTM for 266 models. The transmitter database is customized with specified flange type and material, O-ring and drain / vent materials and meter code option.

Custom configuration (option)

The following data may be specified in addition to the standard configuration parameters:

Descriptor	16 alphanumeric characters
Message	32 alphanumeric characters
Date	Day, month, year

For HART protocol available engineering units of pressure measure are :

Pa, kPa, MPa
inH₂O @ 4 °C, mmH₂O @ 4 °C, psi
inH₂O @ 20 °C, ftH₂O @ 20 °C, mmH₂O @ 20 °C
inHg, mmHg, Torr
g/cm², kg/cm², atm
mbar, bar

These and others are available for PROFIBUS and FOUNDATION Fieldbus.

Transmitter with PROFIBUS PA communication Standard configuration

Transmitters are factory calibrated to customer's specified range. Calibrated range and tag number are stamped on the tag plate. If a calibration range and tag data are not specified, the transmitter will be supplied with the plate left blank and configured as follows:

Measure Profile	Pressure
Engineering Unit	kPa
Output scale 0 %	Lower Range Limit (LRL)
Output scale 100 %	Upper Range Limit (URL)
Output	Linear
Hi-Hi Limit	Upper Range Limit (URL)
Hi Limit	Upper Range Limit (URL)
Low Limit	Lower Range Limit (LRL)
Low-Low Limit	Lower Range Limit (LRL)
Limits hysteresis	0.5 % of output scale
PV filter	0 s
Address (set by local key)	126
Tag	32 alphanumeric characters
Optional LCD display	PV in kPa; output in percentage on bargraph

Any or all the above configurable parameters, including the range values which must be the same unit of measure, can be easily changed by a PC running the configuration software with DTM for 266 models. The transmitter database is customized with specified flange type and material, O-ring and drain / vent materials and meter code option.

Custom configuration (option)

The following data may be specified in addition to the standard configuration parameters:

Descriptor	32 alphanumeric characters
Message	32 alphanumeric characters
Date	Day, month, year

Model 266MST Differential

Model 266RST Absolute

Transmitter with FOUNDATION Fieldbus communication

Standard configuration

Transmitters are factory calibrated to customer's specified range. Calibrated range and tag number are stamped on the tag plate. If a calibration range and tag data are not specified, the transmitter will be supplied with the plate left blank and the analog input function block FB1 is configured as follows:

Measure Profile	Pressure
Engineering Unit	kPa
Output scale 0 %	Lower Range Limit (LRL)
Output scale 100 %	Upper Range Limit (URL)
Output	Linear
Hi-Hi Limit	Upper Range Limit (URL)
Hi Limit	Upper Range Limit (URL)
Low Limit	Lower Range Limit (LRL)
Low-Low Limit	Lower Range Limit (LRL)
Limits hysteresis	0.5 % of output scale
PV filter time	0 s
Tag	32 alphanumeric characters
Optional LCD display	PV in kPa; output in percentage on bargraph

The analog input function blocks FB2 and FB3 are configured respectively for the sensor temperature measured in °C and for the static pressure measured in MPa. Any or all the above configurable parameters, including the range values, can be changed using any host compliant to FOUNDATION Fieldbus. The transmitter database is customized with specified flange type and material, O-ring and drain / vent materials and meter code option.

Mounting Dimensions

(not for construction unless certified) – dimensions in mm (inch)

Transmitter with barrel housing - horizontal flanges

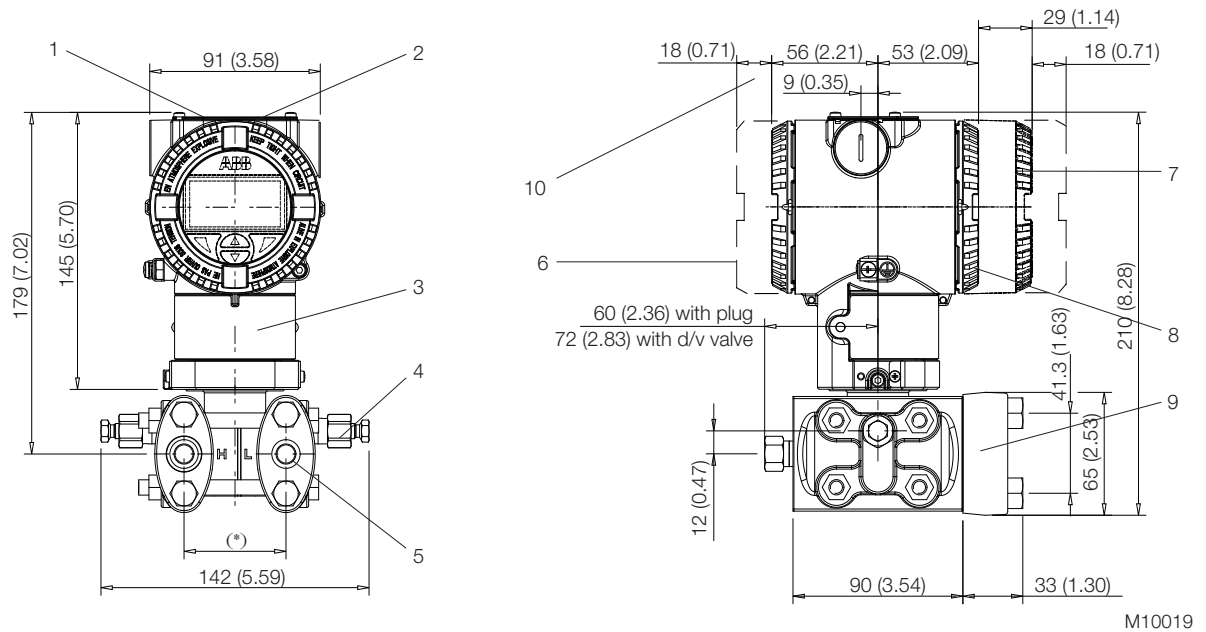


Fig. 1: Dimensions – Barrel housing

1 Adjustments | 2 Identification plate | 3 Certification plate | 4 Drain / vent valve | 5 Process connection | 6 Terminal side | 7 Integral display housing | 8 Electronic side | 9 Adapter | 10 Space for cover removal

* 54 (2.13) mm (in.) on 1/4 - 18 NPT process flange

51 (2.01), 54 (2.13) or 57 (2.24) mm (in) according to 1/4 - 14 NPT adapters fitting;

Note: Bolting threads for fixing adapter or other devices (i.e. manifold etc.) on process flange is 7/16 - 20 UNF.


Note

Process connection, gasket groove and gaskets are in accordance with IEC 61518. Bolting threads for fixing adapter or other devices (i.e. manifold etc.) on process flange is 7/16 - 20 UNF.

Model 266MST Differential

Model 266RST Absolute

Transmitter on bracket for vertical or horizontal 60 mm (2 in.) pipe mounting

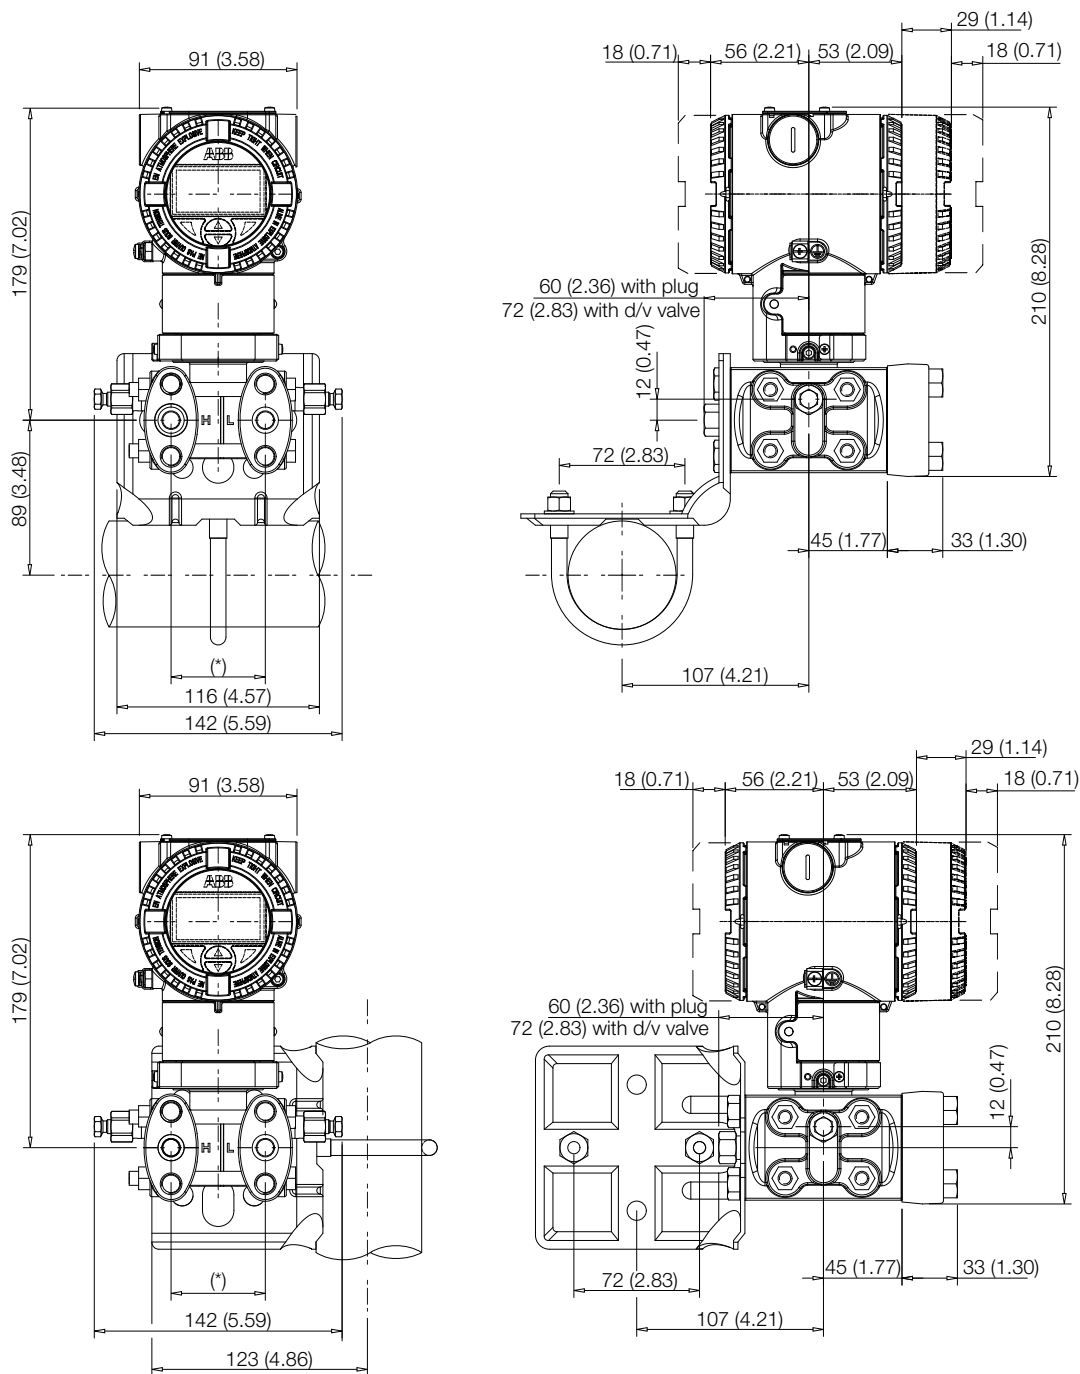

M10020

Fig. 2: Pipe mounting – Barrel housing

Transmitter with DIN aluminium housing - horizontal flanges on bracket for vertical or horizontal 60 mm (2 in.) pipe mounting

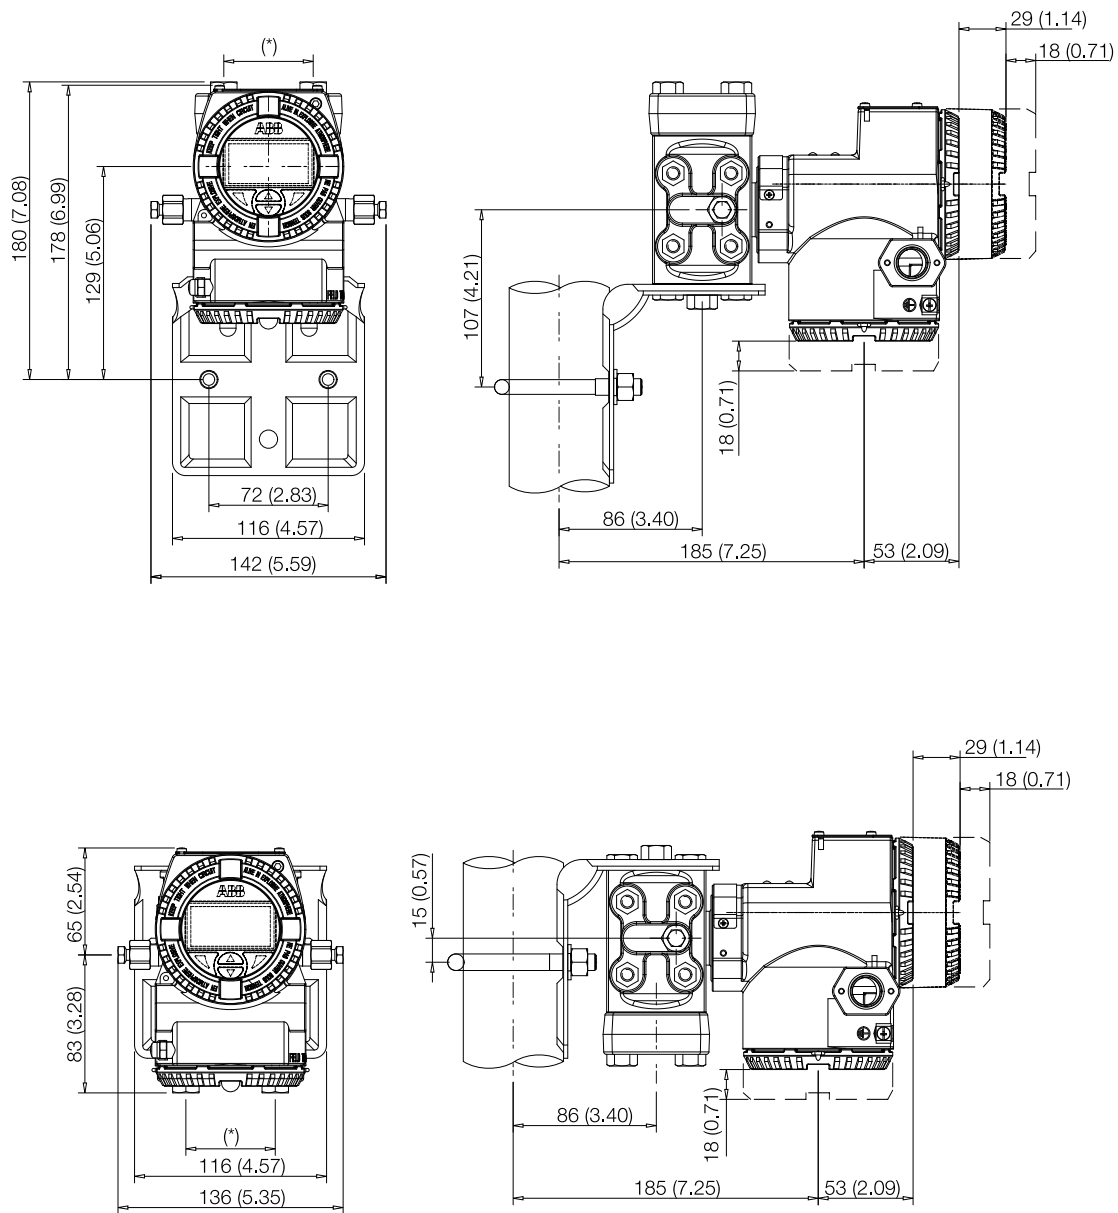



Fig. 3: Pipe mounting – DIN housing

M10021

Model 266MST Differential

Model 266RST Absolute

Transmitter on flat bracket for vertical or horizontal 60 mm (2 in.) pipe mounting

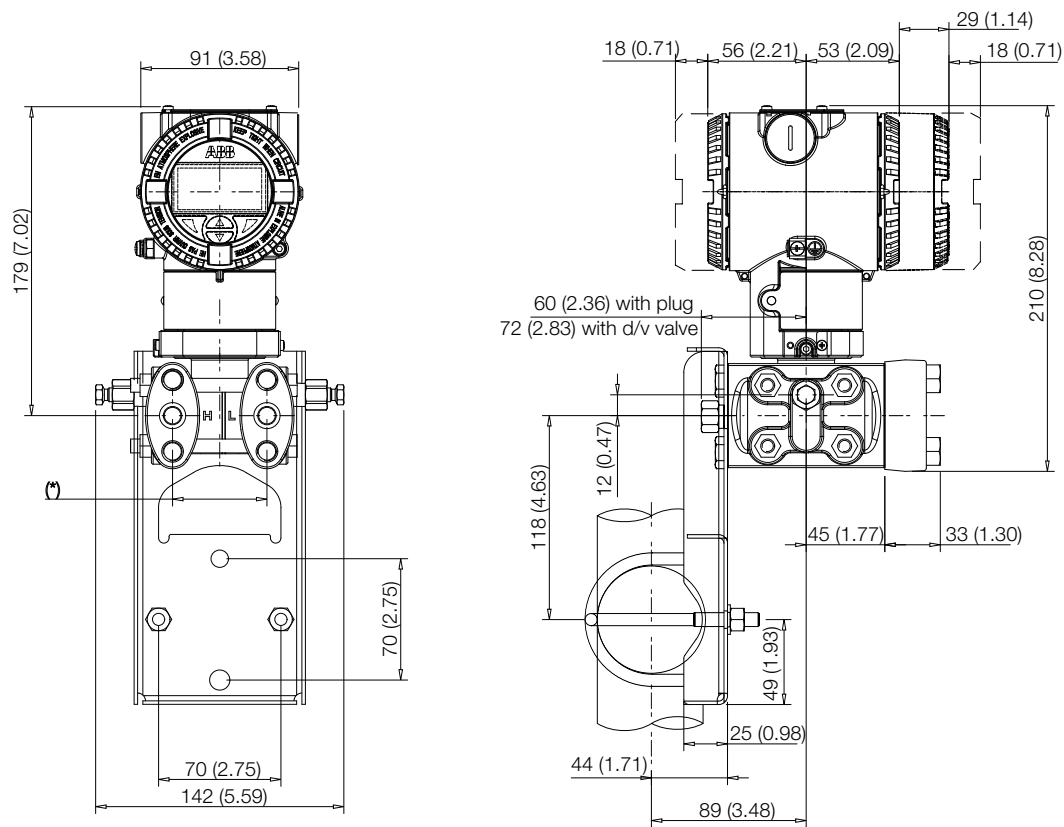


M10022

Fig. 4: Flat bracket for pipe mounting – Barrel housing

Electrical connections

HART Version

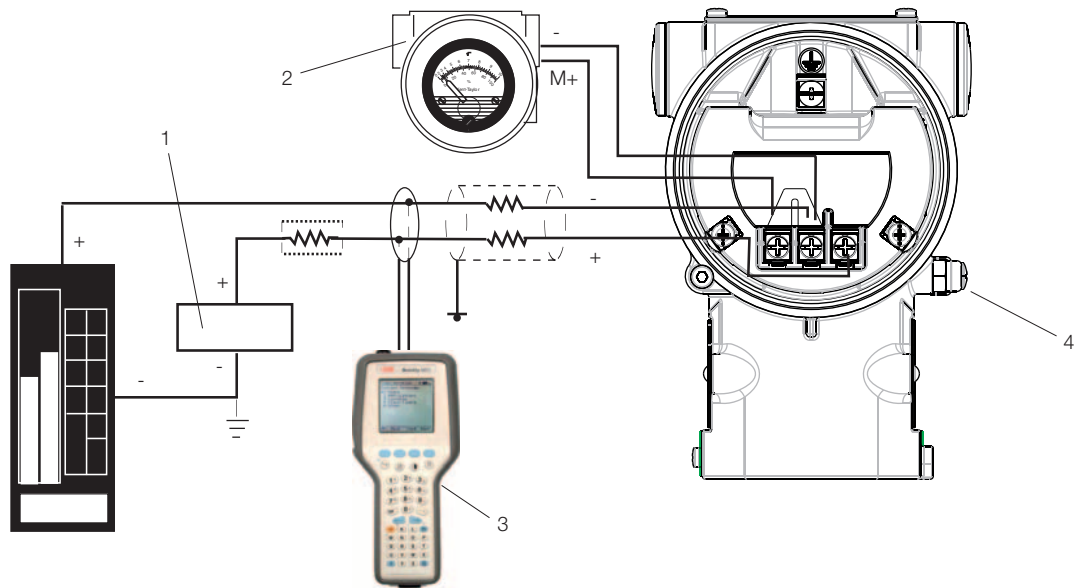

M10023

Fig. 5: Electrical connections – HART version

1 Power source | 2 Remote indicator | 3 Hand-held communicator | 4 External ground termination point

HART hand-held communicator may be connected at any wiring termination point in the loop, providing the minimum resistance is 250 Ω . If this is less than 250 Ω , additional resistance should be added to allow communications.

Model 266MST Differential

Model 266RST Absolute

Fieldbus Versions



Fig. 6: Connector – Fieldbus versions

PIN (male) IDENTIFICATION		
Pin number	FOUNDATION Fieldbus	PROFIBUS PA
1	DATA –	DATA +
2	DATA +	GROUND
3	SHIELD	DATA –
4	GROUND	SHIELD

Connector is supplied loose without mating female plug


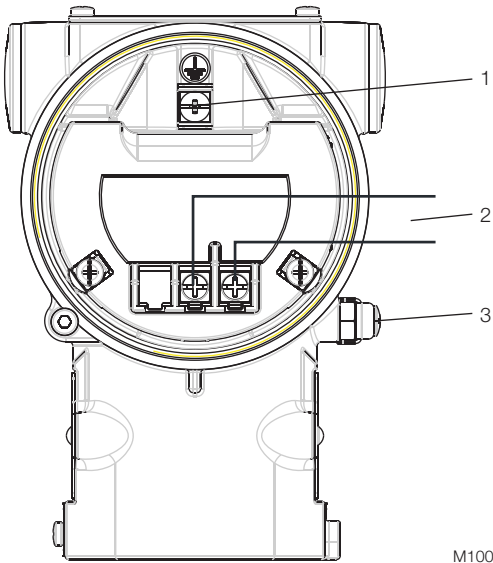


Fig. 7: Standard terminal strip
1 Internal ground termination point | 2 Fieldbus line (polarity independent) | 3 External ground termination point

HART Version

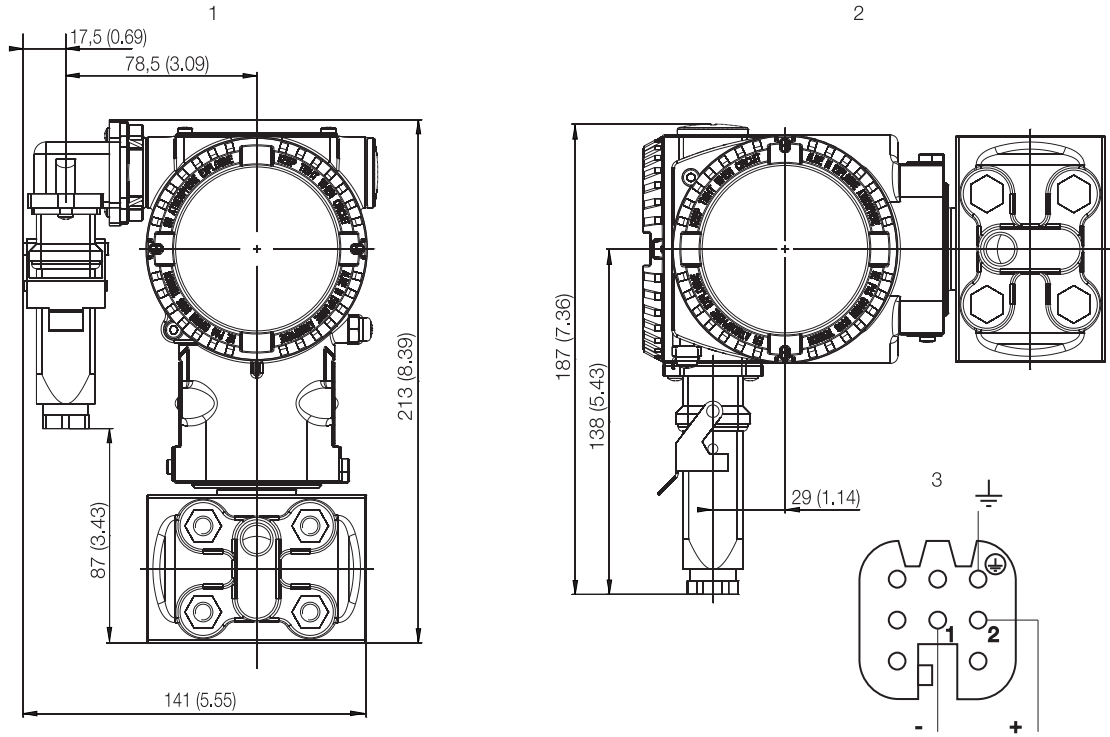

M10008

Fig. 8: Harting Han connector – HART version

1 Barrel housing | 2 DIN housing | 3 Harting Han 8D (8U) socket insert for mating plug supplied (view of sockets)

Model 266MST Differential

Model 266RST Absolute

Ordering information

Basic ordering information model 266MST Differential Pressure Transmitter

Select one character or set of characters from each category and specify complete catalog number.

Refer to additional ordering information and specify one or more codes for each transmitter if additional options are required.

Base model – 1 st to 6 th characters				266MST	X	X	X	X	X	X	X
Differential pressure transmitter, base accuracy 0.04 %											
Sensor Span Limits – 7 th character											continued see next page
0.05 and 1 kPa	0.5 and 10 mbar	0.2 and 4 in. H ₂ O	(Note 1)	A							
0.2 and 6 kPa	2 and 60 mbar	0.8 and 24 in. H ₂ O		C							
0.4 and 40 kPa	4 and 400 mbar	1.6 and 160 in. H ₂ O		F							
2.5 and 250 kPa	25 and 2500 mbar	10 and 1000 in. H ₂ O		L							
20 and 2000 kPa	0.2 and 20 bar	2.9 and 290 psi		N							
100 and 10000 kPa	1 and 100 bar	14.5 and 1450 psi		R							
Maximum Working Pressure – 8 th character											
1 MPa	10 bar	145 psi	(Only available with Process Flanges code P)		Y						
2 MPa	20 bar	290 psi	(Only available with Sensor Span Limits code A)		W						
16 MPa	160 bar	2320 psi	(Not available with Sensor Span Limits code A)		C						
25 MPa	250 bar	3625 psi	(Not available with Sensor Span Limits code A)		Z						
41 MPa	410 bar	5945 psi	(Not available with Sensor Span Limits code A)		T						
Diaphragm Material / Fill Fluid – 9 th character											
AISI 316L SST (1.4435)	Silicone oil			NACE				S			
Hastelloy C-276	Silicone oil			NACE				K			
Monel 400	Silicone oil			NACE				M			
Monel 400 gold-plated	Silicone oil			NACE				V			
Tantalum	Silicone oil			NACE				T			
AISI 316L SST (1.4435)	Inert fluid – Galden	(Suitable for oxygen applications)		NACE				A			
Hastelloy C-276	Inert fluid – Galden	(Suitable for oxygen applications)		NACE				F			
Monel 400	Inert fluid – Galden	(Suitable for oxygen applications)		NACE				C			
Monel 400 gold-plated	Inert fluid – Galden	(Suitable for oxygen applications)		NACE				Y			
Tantalum	Inert fluid – Galden	(Suitable for oxygen applications)		NACE				D			
Process Flanges and Adapters Material / Connection – 10 th character											
AISI 316L SST (1.4404 / 1.4408)	1/4-18 NPT female direct	(horizontal connection)		NACE				A			
AISI 316L SST (1.4404 / 1.4408)	1/2-14 NPT female through adapter	(horizontal connection)		NACE				B			
AISI 316L SST (1.4404 / 1.4408)	1/4-18 NPT female direct (DIN 19213)	(horizontal connection)		NACE				C			
Hastelloy C-276	1/4-18 NPT female direct	(horizontal connection)		NACE				D			
Hastelloy C-276	1/2-14 NPT female through adapter	(horizontal connection)		NACE				E			
Monel 400	1/4-18 NPT female direct	(horizontal connection)		NACE				G			
Monel 400	1/2-14 NPT female through adapter	(horizontal connection)		NACE				H			
Kynar (PVDF)	1/4-18 NPT female direct (MWP = 1 MPa)	(insert on side of flange)						P			
AISI 316L SST (1.4404 / 1.4408)	1/4-18 NPT female direct	(vertical connection)		NACE				Q			

Basic ordering information model 266MST Differential Pressure Transmitter					X	X	X
Bolts Material / Gaskets Material – 11 th character							
AISI 316L SST	Viton	(Suitable for oxygen applications)	NACE	3			
AISI 316L SST	PTFE (Max. 25 MPa / 250 bar / 3625 psi)		NACE	4			
AISI 316L SST	EPDM		NACE	5			
AISI 316L SST	Perbunan		NACE	6			
AISI 316L SST	Graphite		NACE	7			
AISI 316L SST	FEP (Only available with Kynar (PVDF) process connection)		NACE	T			
Housing Material / Electrical Connection – 12 th character							
Aluminium alloy (Barrel type)	1/2-14 NPT						A
Aluminium alloy (Barrel type)	M20 x 1.5						B
Aluminium alloy (Barrel type)	Harting Han connector	(General purpose only)	(Note 2)				E
Aluminium alloy (Barrel type)	Fieldbus connector	(General purpose only)	(Note 2)				G
AISI 316L SST (Barrel type)	1/2-14 NPT						S
AISI 316L SST (Barrel type)	M20 x 1.5						T
Aluminium alloy (DIN type)	M20 x 1.5						J
Aluminium alloy (DIN type)	Harting Han connector	(General purpose only)	(Note 2)				K
Aluminium alloy (DIN type)	Fieldbus connector	(General purpose only)	(Note 2)				W
AISI 316L SST (Barrel type)	Fieldbus connector	(General purpose only)	(Note 2)				Z
Output – 13 th character							
HART digital communication and 4 to 20 mA (No additional options)							H
HART digital communication and 4 to 20 mA (Options requested by "Additional ordering code")							1
PROFIBUS PA (No additional options)							P
PROFIBUS PA (Options requested by "Additional ordering code")							2
FOUNDATION Fieldbus (No additional options)							F
FOUNDATION Fieldbus (Options requested by "Additional ordering code")							3
HART digital communication and 4 to 20 mA with SIL2 declaration of conformity (No additional options)							T
HART digital communication and 4 to 20 mA with SIL2 declaration of conformity (Options requested by "Additional ordering code")							8

Model 266MST Differential

Model 266RST Absolute

Additional ordering information for model 266MST

Add one or more 2-digit code(s) after the basic ordering information to select all required options.

			XX	XX	XX
Accuracy					
Base accuracy 0.025 %	(Note 3)	D1			
Vent and Drain Valve Material / Position					
AISI 316L SST (1.4404)	On process axis	NACE	V1		
AISI 316L SST (1.4404)	On flanges side top	NACE	V2		
AISI 316L SST (1.4404)	On flanges side bottom	NACE	V3		
Hastelloy C-276	On process axis	NACE	V4		
Hastelloy C-276	On flanges side top	NACE	V5		
Hastelloy C-276	On flanges side bottom	NACE	V6		
Monel 400	On process axis	NACE	V7		
Monel 400	On flanges side top	NACE	V8		
Monel 400	On flanges side bottom	NACE	V9		
Explosion Protection Certification					
ATEX Group II Category 1 GD - Intrinsic Safety Ex ia					E1
ATEX Group II Category 1/2 GD - Flameproof Ex d					E2
ATEX Group II Category 3 GD - Type of protection "N" Ex nL design compliance					E3
FM approval (Canada, CSA) Class I, II, Div. 1, 2, Group A to F (XP, IS, NI) (Only available with 1/2-14 NPT or M20 electrical connections)					E4
FM approval (USA) Class I, II, Div. 1, 2, Group A to F (XP, IS, NI) (Only available with 1/2-14 NPT or M20 electrical connections)					E6
FM approvals (USA and Canada) Intrinsic Safety					EA
FM approvals (USA and Canada) Explosion Proof					EB
FM approvals (USA and Canada) Non Incendive					EC
Combined ATEX, FM and CSA (Only available with 1/2-14 NPT or M20 electrical connections)					EN
Combined ATEX - Intrinsic Safety, Flameproof and Type „N“					EW
IEC Approval Group II Category 1 GD - Intrinsic Safety Ex ia					E8
IEC Approval Group II Category 1/2 GD - Flameproof Ex d					E9
IEC Approval Group II Category 3 GD - Type of protection "N" Ex nL design compliance					ER

Additional ordering information for model 266MST		XX	XX	XX	XX	XX	XX
Other hazardous area certifications							
GOST (Russia) Ex ia	W1						
GOST (Russia) Ex d	W2						
GOST (Kazakhstan) Ex ia	W3						
GOST (Kazakhstan) Ex d	W4						
Inmetro (Brazil) Ex ia	W5						
Inmetro (Brazil) Ex d	W6						
Inmetro (Brazil) Ex nL	W7						
Integral LCD							
With integral LCD display	L1						
TTG (Through The Glass) integral digital LCD display	L5						
Mounting bracket (shape and material)							
For pipe mounting / Carbon steel (Not suitable for AISI housing)					B1		
For pipe mounting / AISI 316 ss (Not suitable for AISI housing)					B2		
For wall mounting / Carbon steel (Not suitable for AISI housing)					B3		
For wall mounting / AISI 316 ss (Not suitable for AISI housing)					B4		
Flat type / AISI 316L ss, for AISI housing					B5		
Surge / Transient Protector							
With integral surge / transient protector					S2		
Language of Documentation							
German						M1	
Italian						M2	
Spanish						M3	
French						M4	
English						M5	
Label and Tag Language							
German							T1
Italian							T2
Spanish							T3
French							T4

Model 266MST Differential

Model 266RST Absolute

Additional ordering information for model 266MST		XX	XX	XX	XX	XX
Additional Tag Plate						
Supplemental wired-on stainless steel plate (4 lines, 32 characters each)	I1					
Laser printing of tag on stainless steel plate	I2					
Configuration						
Standard pressure = inH2O / psi at 68 °F		N2				
Standard pressure = inH2O / psi at 39.2 °F		N3				
Standard pressure = inH2O / psi at 20 °C		N4				
Standard pressure = inH2O / psi at 4 °C		N5				
Custom		N6				
Preparation Procedure						
Oxygen service cleaning, Pmax = 12 MPa (120 bar, 1740 psi) or maximum working pressure (lower value), Tmax = 60 °C / 140 °F (only with inert fill / viton gasket)				P1		
Hydrogen service preparation				P2		
Certificates						
Inspection certificate EN 10204-3.1 of calibration					C1	
Inspection certificate EN 10204-3.1 of the cleanliness stage					C3	
Inspection certificate EN 10204-3.1 of helium leakage test of the sensor module					C4	
Inspection certificate EN 10204-3.1 of the pressure test					C5	
Certificate of compliance with the order EN 10204-2.1 of instrument design					C6	
Overfill protection					C9	
Separate calibration record					CC	
PMI test of wetted parts					CT	
Approvals						
GOST (Russia) without Ex						Y1
GOST (Kazakhstan) without Ex						Y2
GOST (Ukraine) without Ex						Y3
GOST (Belarus) without Ex						Y4
DNV approval						YA
Lloyd approval						YB
Approval for Custody Transfer						YC
Bureau Veritas approval						YD

Additional ordering information for model 266MST			XX	XX	XX
Material Traceability					
Certificate of compliance with the order EN 10204-2.1 of process wetted parts		H1			
Inspection certificate EN 10204-3.1 of pressure-bearing and process wetted parts with analysis certificates as material verification (Note 5)		H3			
Material certificate EN 10204-2.2 of the pressure bearing and process wetted parts		H4			
Connector					
Fieldbus 7/8 in. (recommended for FOUNDATION Fieldbus) (supplied loose without female plug)				U1	
Fieldbus M12 x 1 (recommended for PROFIBUS PA) (supplied loose without female plug)				U2	
Harting Han 8D (8U) - straight entry				U3	
Harting Han 8D (8U) - angle entry				U4	
Harting Han 7D				U5	
Housing Accessories					
Integral mount manifold					A1
With mounted integral orifice					A2
Valve manifold + integral orifice					A3
Four-wire add-on unit: Power supply 24 V UC / output signal 0 ... 20 mA	(Note 6)				A4
Four-wire add-on unit: Power supply 24 V UC / output signal 4 ... 20 mA	(Note 6)				A6
Four-wire add-on unit: Power supply 230 V AC / output signal 0 ... 20 mA	(Note 6)				A5
Four-wire add-on unit: Power supply 230 V AC / output signal 4 ... 20 mA	(Note 6)				A7
Plug upside welded					A8
Plug bottom welded					A9
Note 1: Not with Diaphragm Material code M, V, T, C, Y, D					
Note 2: Suitable for oxygen applications					
Note 3: Select connector with additional ordering code					
Note 4: Only with sensor Code F, L, N					
Note 5: Minor parts with factory certificate acc. to EN 10204					
Note 6: Only with Housing Material / Electrical Connection code J (DIN housing)					

Standard delivery items (can be differently specified by additional ordering code)

- Adapters supplied loose
- Plug on axis of connection flange; nothing for PVDF Kynar insert and for vertical connection blind flange (no drain / vent valves)
- General purpose (no electrical certification)
- No display, no mounting bracket, no surge protection
- English manual and labels
- Configuration with kPa and deg. C units
- No test, inspection or material traceability certificates

THE SELECTION OF SUITABLE WETTED PARTS AND FILLING FLUID FOR COMPATIBILITY WITH THE PROCESS MEDIA IS A CUSTOMER'S RESPONSIBILITY, IF NOT OTHERWISE NOTIFIED BEFORE MANUFACTURING.

NACE CONFORMITY IS ACCORDING TO RECOMMENDATIONS PER MR0175. AISI 316 AND HASTELLOY C-276 ALSO COMPLY WITH MR0103 IF ALREADY WITH MR0175.

Model 266MST Differential

Model 266RST Absolute

Basic ordering information model 266RST Absolute Pressure Transmitter

Select one character or set of characters from each category and specify complete catalog number.

Refer to additional ordering information and specify one or more codes for each transmitter if additional options are required.

Base model – 1 st to 6 th characters				266RST	X	X	X	X	X	X	X
Differential pressure transmitter, base accuracy 0.04 %											
Sensor - Span Limits – 7 th character											continued see next page
2 and 40 kPa	20 and 400 mbar	15 and 300 mmHg		F							
12.5 and 250 kPa	125 and 2500 mbar	95 and 1875 mmHg		L							
100 and 2000 kPa	1 and 20 bar	15 and 290 psi		N							
Maximum Working Pressure – 8 th character											
16 MPa	160 bar	2320 psi	(not with Sensor Span Limits code A)						C		
25 MPa	250 bar	3625 psi	(not with Sensor Span Limits code A)						Z		
41 MPa	410 bar	5945 psi	(not with Sensor Span Limits code A)						T		
Diaphragm Material / Fill Fluid – 9 th character											
Hastelloy C-276 / Silicone oil (NACE)										K	
Process Flanges and Adapters Material / Connection – 10 th character											
AISI 316L ss	1/4-18 NPT-f direct	(horizontal connection)		NACE						A	
AISI 316L ss	1/2-14 NPT-f through adapter	(horizontal connection)		NACE						B	
AISI 316L ss	1/4-18 NPT-f direct (DIN 19213)	(horizontal connection)								Q	
Bolts Material / Gaskets Material – 11 th character											
Stainless steel	Viton	NACE	(Note 1)								
Stainless steel	PTFE (max. 25 MPa / 250 bar / 3626 psi)	NACE									
Stainless steel	EPDM	NACE									
Stainless steel	Perbunan	NACE									
Stainless steel	Graphite	NACE									

BASIC ORDERING INFORMATION model 266RST Absolute Pressure Transmitter				X	X
Housing Material / Electrical Connection – 12th character					
Aluminium alloy (barrel version)	1/2-14 NPT			A	
Aluminium alloy (barrel version)	M20 x 1.5			B	
Aluminium alloy (barrel version)	Harting Han connector	(general purpose only)	(Note 2)	E	
Aluminium alloy (barrel version)	Fieldbus connector	(general purpose only)	(Note 2)	G	
AISI 316L ss (barrel version)	1/2-14 NPT			S	
AISI 316L ss (barrel version)	M20 x 1.5			T	
Aluminium alloy (DIN version)	M20 x 1.5			J	
Aluminium alloy (DIN version)	Harting Han connector		(Note 2)	K	
Aluminium alloy (DIN version)	Fieldbus connector		(Note 2)	W	
AISI 316L ss (barrel version)	Fieldbus connector	(general purpose only)	(Note 2)	Z	
Output – 13th character					
HART digital communication and 4 to 20 mA		No additional options			H
HART digital communication and 4 to 20 mA		Options requested by "Additional ordering code"			1
PROFIBUS PA		No additional options			P
PROFIBUS PA		Options requested by "Additional ordering code"			2
FOUNDATION Fieldbus		No additional options			F
FOUNDATION Fieldbus		Options requested by "Additional ordering code"			3
HART digital communication and 4 to 20 mA with SIL2 declaration of conformity		No additional options			T
HART digital communication and 4 to 20 mA with SIL2 declaration of conformity		Options requested by "Additional ordering code"			8

Model 266MST Differential

Model 266RST Absolute

ADDITIONAL ORDERING INFORMATION for model 266RST

Add one or more 2-digit code(s) after the basic ordering information to select all required options.

	XX	XX	XX
Drain or Vent Valve Material / Position			
AISI 316L ss On process axis NACE	V1		
AISI 316L ss On flanges side top NACE	V2		
AISI 316L ss On flanges side bottom NACE	V3		
Hazardous area certifications			
ATEX Intrinsic Safety II 1 G and II 1/2 G Ex ia IIC T6; II 1 D Ex iaD 20 T 95° C and II 1/2D Ex iaD 21 T95° C			E1
ATEX Explosion Proof Group II Category 1/2 G Ex d IIC T6 and Group II Category 1/2 D Ex tD A21 IP67 T85° C			E2
ATEX Type „N“ Group II Category 3 G Ex nL IIC T6 and Group II Category 3 D Ex tD A22 IP67 T85° C			E3
ATEX Intrinsic Safety Ex ia, Explosion Proof Ex d, Type "N" Ex nL			EW
Combined ATEX, FM approval (USA) and FM approval (Canada)			EN
FM approval (Canada)			E4
FM approval (USA)			E6
FM approvals (USA and Canada) Intrinsic Safety			EA
FM approvals (USA and Canada) Explosion Proof			EB
FM approvals (USA and Canada) Non Incendive			EC
IEC Intrinsic Safety II 1 G and II 1/2 G Ex ia IIC T6; II 1 D Ex iaD 20 T 95° C and II 1/2D Ex iaD 21 T95° C			E8
IEC Explosion Proof Group II Category 1/2 G Ex d IIC T6 and Group II Category 1/2 D Ex tD A21 IP67 T85° C			E9
IEC Group II Category 3 G Ex nL IIC T6 and Group II Category 3 D Ex tD A22 IP67 T85° C			ER
Other hazardous area certifications			
GOST (Russia) Ex ia			W1
GOST (Russia) Ex d			W2
GOST (Kazakhstan) Ex ia			W3
GOST (Kazakhstan) Ex d			W4
Inmetro (Brazil) Ex ia			W5
Inmetro (Brazil) Ex d			W6
Inmetro (Brazil) Ex nL			W7

Additional ordering information for model 266RST				XX	XX	XX	XX	XX	XX
Integral LCD									
With integral LCD display				L1					
TTG (Through The Glass) integral digital LCD display				L5					
Mounting Bracket Shape / Material									
For pipe mounting / Carbon steel	(Not suitable for AISI housing)			B1					
For pipe mounting / AISI 316 ss	(Not suitable for AISI housing)			B2					
For wall mounting / Carbon steel	(Not suitable for AISI housing)			B3					
For wall mounting / AISI 316 ss	(Not suitable for AISI housing)			B4					
Flat type / AISI 316L ss	For AISI housing			B5					
Surge / Transient Protector									
With integral surge / transient protector					S2				
Language of Documentation									
German							M1		
Italian							M2		
Spanish							M3		
French							M4		
English							M5		
Label and Tag Language									
German								T1	
Italian								T2	
Spanish								T3	
French								T4	
Additional Tag Plate									
Supplemental wired-on stainless steel plate (4 lines, 32 characters each)									I1
Laser printing of tag on stainless steel plate									I2

Model 266MST Differential

Model 266RST Absolute

Additional ordering information for model 266RST					XX	XX	XX	XX	XX
Configuration									
Standard pressure = inH2O / psi at 68 °F					N2				
Standard pressure = inH2O / psi at 39.2 °F					N3				
Standard pressure = inH2O / psi at 20 °C					N4				
Standard pressure = inH2O / psi at 4 °C					N5				
Custom					N6				
Preparation Procedure									
Hydrogen service preparation						P2			
Certificates									
Inspection certificate EN 10204-3.1 of calibration								C1	
Inspection certificate EN 10204-3.1 of the cleanliness stage								C3	
Inspection certificate EN 10204-3.1 of helium leakage test of the sensor module								C4	
Inspection certificate EN 10204-3.1 of the pressure test								C5	
Certificate of compliance with the order EN 10204-2.1 of instrument design								C6	
Separate calibration record								CC	
PMI test of wetted parts								CT	
Approvals									
GOST (Russia) without Ex								Y1	
GOST (Kazakhstan) without Ex								Y2	
GOST (Ukraine) without Ex								Y3	
GOST (Belarus) without Ex								Y4	
DNV approval								YA	
Lloyd approval								YB	
Approval for Custody Transfer								YC	
Bureau Veritas approval								YD	
Material Traceability									
Certificate of compliance with the order EN 10204-2.1 of process wetted parts									H1
Inspection certificate EN 10204-3.1 of pressure-bearing and process wetted parts with analysis certificates as material verification							(Note 3)		H3
Material certificate EN 10204-2.2 of the pressure bearing and process wetted parts									H4

Additional ordering information for model 266RST		XX	XX
Connector			
Fieldbus 7/8 in. (recommended for FOUNDATION Fieldbus) (supplied loose without female plug)		U1	
Fieldbus M12 x 1 (recommended for PROFIBUS PA) (supplied loose without female plug)		U2	
Harting Han 8D (8U) - straight entry		U3	
Harting Han 8D (8U) - angle entry		U4	
Harting Han 7D		U5	
Housing Accessories			
Integral mount manifold			A1
Four-wire add-on unit: Power supply 24 V UC / output signal 0 to 20 mA	(Note 4)		A4
Four-wire add-on unit: Power supply 24 V UC / output signal 4 to 20 mA	(Note 4)		A6
Four-wire add-on unit: Power supply 230 V AC / output signal 0 to 20 mA	(Note 4)		A5
Four-wire add-on unit: Power supply 230 V AC / output signal 4 to 20 mA	(Note 4)		A7
Plug upside welded			A8
Plug bottom welded			A9
Note 1: Suitable for oxygen applications			
Note 2: Select connector with additional ordering code			
Note 3: Minor parts with factory certificate acc. to EN 10204			
Note 4: Only with Housing Material / Electrical Connection code J (DIN housing)			

Standard delivery items (can be differently specified by additional ordering code)

- Adapters supplied loose
- Plug on axis of connection flange; nothing for PVDF Kynar insert and for vertical connection blind flange (no drain/vent valves)
- General purpose (no electrical certification)
- No display, no mounting bracket, no surge protection
- English manual and labels
- Configuration with kPa and deg. C units
- No test, inspection or material traceability certificates

THE SELECTION OF SUITABLE WETTED PARTS AND FILLING FLUID FOR COMPATIBILITY WITH THE PROCESS MEDIA IS A CUSTOMER'S RESPONSIBILITY, IF NOT OTHERWISE NOTIFIED BEFORE MANUFACTURING.

NACE CONFORMITY IS ACCORDING TO RECOMMENDATIONS PER MR0175. AISI 316 AND HASTELLOY C-276 ALSO COMPLY WITH MR0103 IF ALREADY WITH MR0175.

Contact us

ABB Ltd.

Howard Road, St. Neots
Cambridgeshire, PE19 8EU
UK
Phone: +44 (0)1480 475321
Fax: +44 (0)1480 217948

ABB Inc.

125 E. County Line Rd
Warminster PA 18974
USA
Phone: +1 215 674 6000
Fax: +1 215 674 7183

ABB Automation Products GmbH

Schillerstr. 72
32425 Minden
Germany
Phone: +49 551 905-534
Fax: +49 551 905-555

www.abb.com

Note

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents - in whole or in parts - is forbidden without prior written consent of ABB.

Copyright© 2011 ABB
All rights reserved

™ Hastelloy C276 is a Cabot Corporation trademark

™ Monel is an International Nickel Co. trademark

™ Viton is a Dupont de Nemour trademark

™ Galden is a Montefluos trademark

™ Kynar is an Elf Atochem North America Inc trademark

DS/266MST/RST-EN Rev. B 05.2011 | 3KXP300004R1001